


DR67 SERIES NOVA22 3-PHASE AC OUTPUT DIN RAIL MOUNT SOLID STATE RELAYS

DR67 Series 3-Phase Solid State Relays offer the advantages of semiconductor switching technology in a compact 67.5 mm industrial package. Read all installation instructions before using your DIN Rail Mount Solid State Relay (SSR) and refer to the product datasheet for more information. For assistance, please contact Tech Support.

INSTALLATION INSTRUCTIONS



Mounting on DIN Rail

- Locate rail and align with non moveable end of DR67 DIN clip.
- Using reasonable force, push DR67 in the direction of the arrow (as shown in fig.1).
- For removal pull release tag by moving blade of screwdriver in direction of arrow and pull it away from DIN rail.
- For models with integrated fan removal tool must be inserted from the side (as shown in fig. 2)



Mounting on Panel (25A & 30A models only)

- Locate the panel section on which the DR67 SSR will be mounted on (as shown in fig.3)
- DIN clip includes tabs for this type of mounting. Tab holes have a diameter of 4.5 mm. You will need three screws (not included) no larger than that to mount the SSR onto panel.
- Align SSR tabs with panel surface and screw both top and bottom sides. Recommended torque is 12 lb-in (1.36 Nm).



Wiring Instructions

- Recommended wire sizes as shown in TABLE 1
- Maximum terminal screw torque input terminal 5 lb-in (0.5 Nm) (screw terminal only)
- Maximum terminal screw torque load terminal 18-20 lb-in (2.0-2.2 Nm)
- Strip length for input terminals: Per manufacturer specifications
- Strip length for load terminals: 10mm min.
- Use only copper conductors rated for 75°C or higher.
- If multiple units are installed be sure to follow derating curves.

WARNING!!

- Removing product from 35mm Rail incorrectly by not using the appropriate tool, would damage the latching system.

Table 1. Wire Size & Pull Out Strength





Terminal Configuration	Recommended Wire Size (Solid/Stranded)	Wire Pull-Out Strength (lb)[N]*
Output	1 x 18 AWG (1 mm ²) [minimum]	20 [88]
	1 x 8 AWG (10 mm ²)	75 [333]
	2 x 8 AWG (10 mm ²)	65 [289]
	1 x 3 AWG (26.67 mm ²) ⁽¹⁾	90 [400]
Input	Screw	30 AWG (0.05 mm ²) [minimum]
		12 AWG (3.3 mm ²) [maximum]
	Spring ⁽²⁾	26 AWG (0.13 mm ²) [minimum]
		12 AWG (3.3 mm ²) [maximum]

*Tests performed on Stranded wire


⁽¹⁾ Maximum wire size 1 x 2 AWG (35mm²), torque 24 lb-in (2.7 Nm) & strip length 12.7mm min.

⁽²⁾ Applicable when using CP202 connector instead of supplied connector

DERATING CURVES



WIRING DIAGRAM

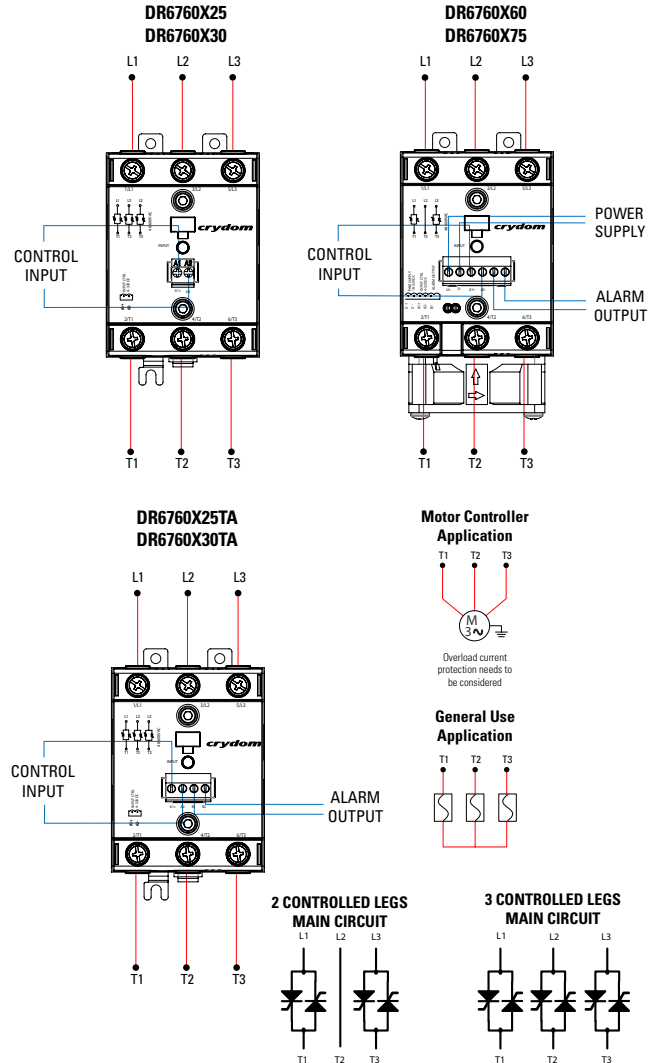

Important Considerations

- Be sure to use input and output voltages within operating ranges.
- On models without overtemperature protection or integrated fan, LED indicates only input status. It does not represent output status.
- To achieve maximum ratings, there must be a minimum spacing of 0.87 inch (22mm) between the devices in free air (as shown in fig.4).
- To achieve maximum current rating in continuous operation, the SSR should be mounted aligned vertically to allow natural convection air flow. Otherwise, use derating curves for multiple units.






fig.4 Multiple units mounting for maximum ratings

WARNING! On version with integrated Fan (60 and 75 amps models), do not replace or operate without Fan.

(only for models with overtemperature protection or integrated fan)

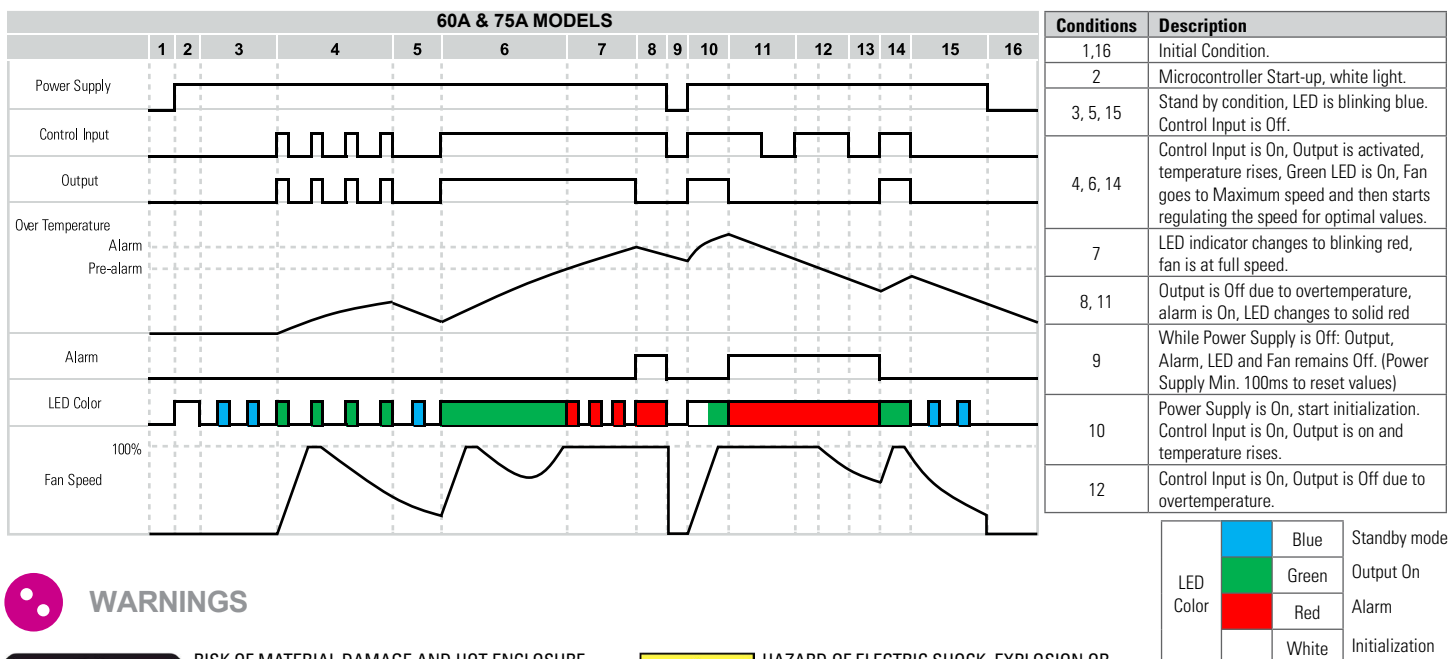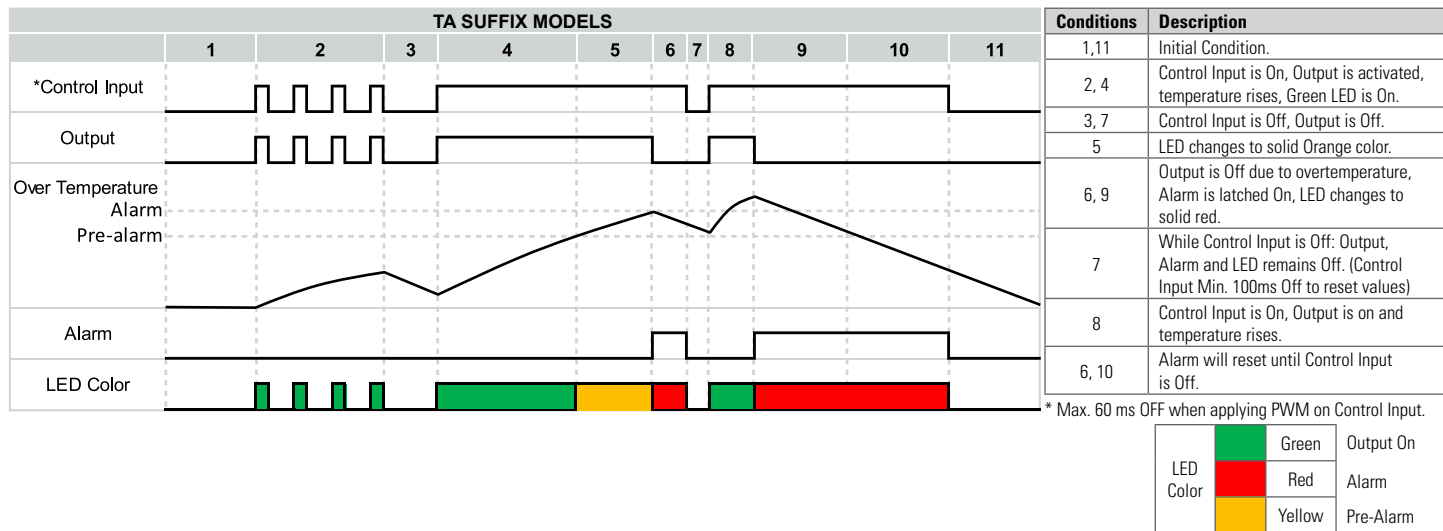

WARNINGS



RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
 - Follow proper mounting instructions including torque values
 - Do not allow liquids or foreign objects to enter this product
- Failure to follow these instructions can result in serious injury, or equipment damage.**



HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
 - Verify all connections and replace all covers before turning on power
- Failure to follow these instructions will result in death or serious injury.**

Sensata Technologies, Inc. ("Sensata") installation sheet are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA INSTALLATION SHEET ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE INSTALLATION SHEET OR USE OF THE INSTALLATION SHEET, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas
+1 (877) 502 5500
sales.crydom@sensata.com

Europe, Middle East & Africa
+44 (1202) 416170
ssr-info.eu@sensata.com

Asia Pacific
sales.isasia@list.sensata.com
China +86 (21) 2306 1500
Japan +81 (45) 277 7117
Korea +82 (31) 601 2004
India +91 (80) 67920890
Rest of Asia +886 (2) 27602006 ext 2808