


AC Fan Motor

60 sq.×30t
(ASEN6)

NEW



DIMENSIONS (mm inch)

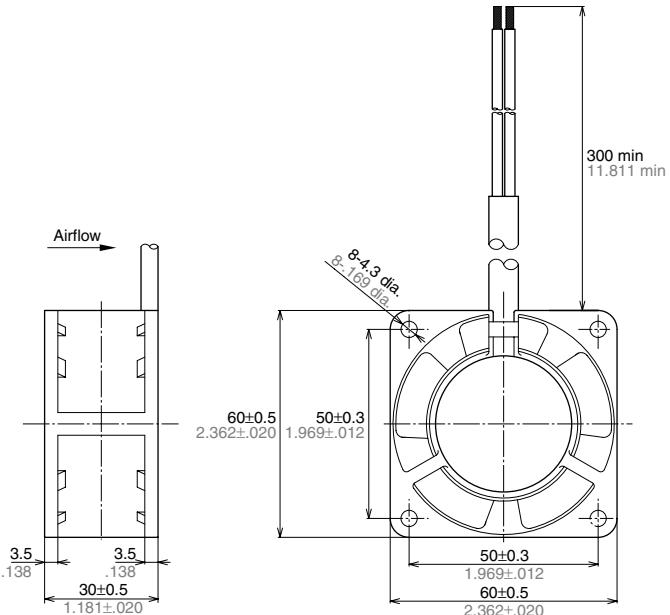

RoHS Directive compatibility information
<http://www.nais-e.com/>

RATING

Lead wire type, Standard speed


Part number	Rated voltage (V)	Frequency (Hz)	Input power, $\pm 10\%$ (W)	Rated current*1 (mA)	Locked current*3 (mA)	Rotation speed*2 (r/min)	Max. air flow*2 (m³/min)	Max. static pressure*2 (Pa)	Noise*3 (dB(A))	Operating voltage range (V) (%)	Weight (kg)
ASEN60511	100	50/60	6/5	80/70	85/75	2000/2600	0.2/0.26	13.7/22.6	28/29 (29/30)	±10	0.14
ASEN60512	115		4.5/4	70/60	70/60						

*1: Designates maximum values. *2: Designates minimum values, *3: Designates average values

Notes: 1. Values above without designations are averages.

2. Noise level was measured at a distance of 1 m from side of fan. Values in brackets were measured at a distance of 1 m from front of fan.

DATA (Airflow - Static pressure Characteristic Curve)

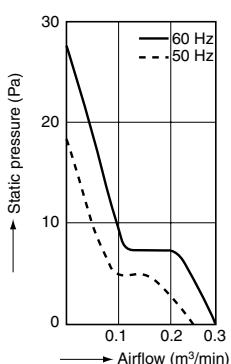

MATERIALS USED

Frame: aluminum alloy die-casting

Label: 100 V class...black base

Propeller: plastic

Bearings: ball bearings

Lead wires: UL3266 and AWG22

SPECIFICATIONS

Ambient temperature	-10°C to +60°C +14°F to +140°F								
Ambient humidity	15 to 85%RH								
Storage temperature	-20°C to +70°C -4°F to +158°F								
Breakdown voltage	1,500 V AC for 1 min. (between charging section and frame)								
Insulation resistance	Min. 100MΩ (at 500 V DC megger)(between charging section and frame)								
Insulation class	UL:A class, CSA:B class								
Vibration resistance	<table border="1"> <tr> <td>Frequency</td> <td>10 to 55Hz</td> </tr> <tr> <td>Double amplitude width</td> <td>0.75mm</td> </tr> <tr> <td>Applied direction</td> <td>X, Y and Z directions</td> </tr> <tr> <td>Applied time</td> <td>10 min. in each direction</td> </tr> </table>	Frequency	10 to 55Hz	Double amplitude width	0.75mm	Applied direction	X, Y and Z directions	Applied time	10 min. in each direction
Frequency	10 to 55Hz								
Double amplitude width	0.75mm								
Applied direction	X, Y and Z directions								
Applied time	10 min. in each direction								
Protection	Impedance protected								
Mean life	MTTF: 50,000 hrs. (Time it takes until rotation frequency drops 30% of initial value when run continuously under 25°C 77°F and room humidity at the nominal voltage.)								