


DATA SHEET | ENGLISH

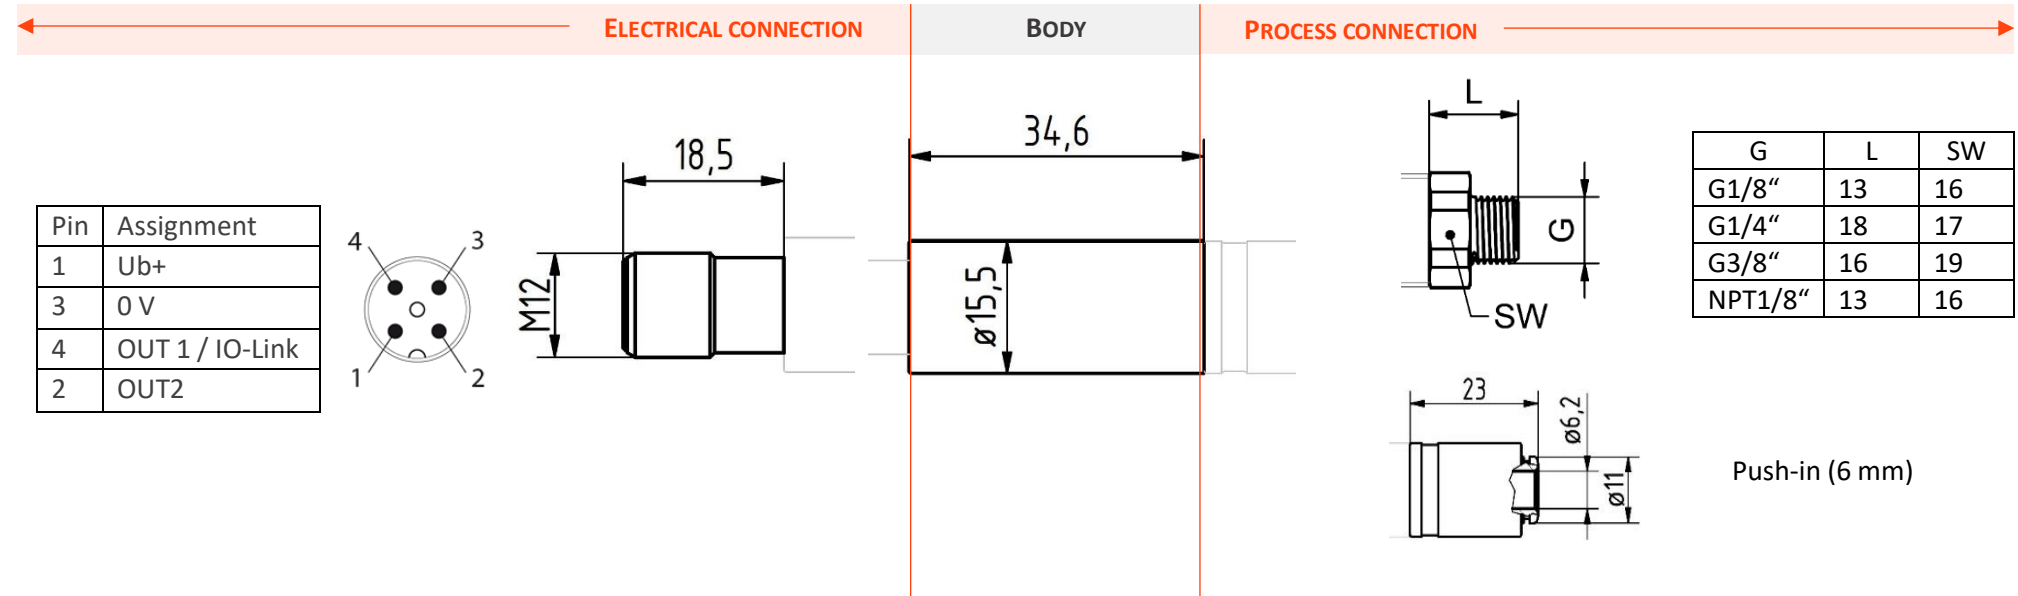

General data

Setting options

Switch points; NO/NC; Hysteresis / window mode; On/Off Delay; Programming lock ex works

Operating medium

Filtered, dry or oiled air and non-corrosive gases

Protection class

IP65

MTTF (40°C)

713 years

Ordering information

1 - 04 - XX XX - XX 3 X XX

Process connection

G1/8"02

G1/4"03

NPT1/8"04

Push-in 6 mm07

G3/8"09

Electrical connection

M12 4-pole02

Output signal

2x PNP03

2x NPNon request

Firmware

Standard00

Customized>00

Pressure range

barpsi

-1...0-14.5...01

-1...1-14.5...14.52

-1...10-14.5...1453

0...100...1454

0...120...1745

-1...3-14.5...43.56

0...0.250...3.68

Electrical data	
Electrical connection	M12x1, 4-pole (only programmable via IO-Link)
Operating voltage	9...30 VDC (UL: class 2 source only)
Current consumption	< 25 mA
Short-circuit / reverse polarity protection	yes / yes
Output	
Output signal	2x PNP (IO-Link is optionally available); 2x NPN (only without IO-Link)
Output voltage	approx. Ub -1.5 V
Max. output current	max. 250 mA each output
Output function	NO / NC (programmable)
Capacitive load OUT1	200 nF
Accuracy (23°C)	± 0.5% FS
max. temperature error	± 1.5% FS (-10°C...60°C)
Repeatability	± 0.2% FS
Long term drift	≤ 0.1% / a
IO-Link	
IO-Link specification	Version 1.1
Frame type	2.2
Transmission rate	COM 2 / 38.4 Kbit/s
Process data width	24 bit
Measurement information	16 bit
Switch point information	2 bit
Max. cycle time	5 msec

Mechanical data	
Material housing	Stainless steel
Process connection	G1/8"; G1/4"; G3/8"; NPT1/8"; Push-in 6 mm
Material process connection	Brass nickel-plated
Mounting position	Any (port downwards when using oiled air)
Weight	32 g
Pressure range	
Measuring range (bar)	0...0.25
(psi)	0...3.26
max. overpressure* (bar)	0.5
(psi)	7.25
	-1...0
	-14.5...0
	-1...1
	-14.5...14.5
	-1...3
	-14.5...43.5
	-1...10
	-14.5...145
	0...10
	0...145
	0...12
	0...174
	2
	29
	6
	87
	15
	217.6
Operating conditions	
Operating temperature	Operation: -10°...+60°C (UL: 0°...+60°C) Storage: -20°...+85°C
EMC / interference immunity	EN61000-6-2
EMC / interference emission	EN61000-6-4
UL approval	E511277
LABS conformity	VDMA 24364-B1/B2/C1-L/W

* overpressure not continuously allowed