

› Expansion Modules

Digital Expansions DC

Size 35 & 70 mm

- › Compatible with many base (See Datasheet for Supply constraint)
- › Can be used to reach a 60 I/Os configuration
- › 2 Dimensions available: 35 and 70 mm
- › External power supply
- › Possibility to add several extensions



Digital Expansions
35 mm



Digital Expansions
70 mm

| Selection guide | | | | | |
|-----------------|--------|---------------|-----------------------------------|------------|----------------|
| Type | Inputs | Outputs | Power supply | Dimensions | Part Number |
| MXR | 4 | 4 relays | 12 → 24 V $\overline{\text{---}}$ | 35 mm | MXR08D7 |
| MXR | 8 | 8 relays | 12 → 24 V $\overline{\text{---}}$ | 70 mm | MXR16D7 |
| MXS | 4 | 4 solid state | 24 V $\overline{\text{---}}$ | 35 mm | MXS08D1 |
| MXS | 8 | 8 solid state | 24 V $\overline{\text{---}}$ | 70 mm | MXS16D1 |

| | | | |
|----------------|----------------|----------------|----------------|
| MXR08D7 | MXR16D7 | MXS08D1 | MXS16D1 |
|----------------|----------------|----------------|----------------|

Power Supply

Supply characteristics

| | | |
|------------------------------|--|--|
| Nominal voltage | 12 → 24 V $\overline{\text{---}}$ | 24 V $\overline{\text{---}}$ |
| Operating limits | 10.8 → 28.8 V $\overline{\text{---}}$ | 20.4 → 28.8 V $\overline{\text{---}}$ |
| Max. absorbed power | 1W @ 12 V $\overline{\text{---}}$ 2W @ 28.8 V $\overline{\text{---}}$ | 2W @ 12 V $\overline{\text{---}}$ 3W @ 28.8 V $\overline{\text{---}}$ 1W @ 20.4 V $\overline{\text{---}}$ 1W @ 28.8 V $\overline{\text{---}}$ |
| Immunity to micro power cuts | 1 ms | |
| Power supply earthing | None | |
| Reverse polarity protection | Yes | |

Inputs

Digital Inputs

| | | | | |
|------------------|---|---|---|---|
| Number of Inputs | 4 | 8 | 4 | 8 |
| Input voltage | 0-28.8 V $\overline{\text{---}}$ | | | |
| Input current | $\approx 1.1332 \text{ mA @ } 10.8 \text{ V}$ $\approx 1.3097 \text{ mA @ } 12 \text{ V}$ $\approx 2.5453 \text{ mA @ } 20.4 \text{ V}$ $\approx 3.0748 \text{ mA @ } 24 \text{ V}$ $\approx 3.7808 \text{ mA @ } 28.8 \text{ V}$ | | $\approx 2.5453 \text{ mA @ } 20.4 \text{ V}$ $\approx 3.0748 \text{ mA @ } 24 \text{ V}$ $\approx 3.7808 \text{ mA @ } 28.8 \text{ V}$ | |

| | | | | | | | | | | | | | |
|---------------------------|--------------|---------------|--|--|--|----------------------|--------------|---------------|----------------------------------|-------------------------|--|--|--------------|
| Codification EXPANSION | M | X | R | 16 | U1 | Codification BASE | M | X | D | 12 | R | U1 | ET |
| | M: Millenium | X: Expandable | S: Static Output R: Relay Output AI: Analog Input AO: Analog Output | 16: 08 / 08 08: 04 / 04 02: 02 / 00 00 / 02 | Power Supply U1: 24 V $\overline{\text{---}}$ U3: 110-230 V $\overline{\text{---}}$ D1: 24 V $\overline{\text{---}}$ D7: 12-24 V $\overline{\text{---}}$ | | M: Millenium | X: Expandable | Display D: With B: Without | Input/Output 08 / 04 | S: Static Output R: Relay Output AI: Analog Input AO: Analog Output | Power Supply U1: 24 V $\overline{\text{---}}$ U3: 110-230 V $\overline{\text{---}}$ D1: 24 V $\overline{\text{---}}$ D7: 12-24 V $\overline{\text{---}}$ | ET: Ethernet |

You have a project? Contact us on www.crouzet.com

Description:

The Millenium is the latest product in Crouzet's Millenium series. This is a compact, networked, and communicative PLC. Its flexible deployment and extensive configuration options with various extensions make it suitable for a wide range of applications.

Accompanied by powerful, intuitive software, it will support you throughout your automation needs.

For more information about **Millenium**: please visit www.crouzet.com

| | MXR08D7 | MXR16D7 | MXS08D1 | MXS16D1 |
|---|--|------------------|---|------------------|
| Input Impedance | 13.4 KΩ | | | |
| Logic 1 voltage threshold | > 8.5 V $\overline{\text{---}}$ | | > 12 V $\overline{\text{---}}$ | |
| Making current at logic state 1 | 0.7949 mA | | 1.3097 mA | |
| Logic 0 voltage threshold | < 5 V $\overline{\text{---}}$ | | | |
| Release current at logic state 0 | 0.2890 mA | | | |
| Response time | 1 to 2 cycle time (normal input) | | | |
| Input type | Resistive | | | |
| Conforming with IEC 61131-2 | Type 1 | | | |
| Isolation between power supply and inputs | None | | | |
| Isolation between inputs | None | | | |
| Protection against polarity inversion | Yes | | | |
| Max cable length | ≤100m (Shielded) | | | |
| Status indicator | On Display (LCD) when used with LCD base | | | |
| Outputs | | | | |
| Relay Outputs | | | | |
| Quantity | 4 relays outputs | 8 relays outputs | NA | |
| Max. breaking voltage | 250 V \sim 30 V $\overline{\text{---}}$ | | NA | |
| Max. Breaking current | 5 A @ 230 V \sim (resistive) 5 A @ 30 V $\overline{\text{---}}$ (resistive) | | NA | |
| Mechanical life | 1x 10 ⁷ | | NA | |
| Electrical durability | Resistive load at 85 °C: 5 A, 250 V \sim , 50 K Cycles | | NA | |
| Minimum switching capacity | 100 mA (at minimum voltage of 12V) | | NA | |
| Maximum rate | 10Hz | | NA | |
| Voltage for withstanding shocks | 2kV | | NA | |
| Response time | Make = 1 cycle time + 8 ms Release = 1 cycle time + 5 ms | | NA | |
| Isolation between power supply and outputs | Yes | | NA | |
| Isolation between outputs | Yes | | NA | |
| Built-in protections | ▪ Against short-circuits: None ▪ Against overvoltages and overloads: None | | NA | |
| Status indicator | On LCD screen (Only on PLC with display) | | NA | |
| Cable length | ≤ 30 meter | | NA | |
| Static (transistor - Sourcing) Outputs | | | | |
| No. of Outputs | NA | | 4 static outputs | 8 static outputs |
| Breaking voltage | NA | | 10 to 28.8 V $\overline{\text{---}}$ | |
| Nominal voltage | NA | | 12 / 24 V $\overline{\text{---}}$ | |
| Nominal current | NA | | 0.5 A | |
| Max. breaking current | NA | | 0.625 A | |
| Voltage drop | NA | | < 2V for I=0.5A | |
| Min. load | NA | | 10 mA | |
| Response time | NA | | Make = 1 cycle time + 60 μs max Release = 1 cycle time + 60 μs max | |
| Built-in protections - Short circuit proof | NA | | Yes | |
| Built-in protections - Over load protection | NA | | Over-temperature shutoff | |
| Built-in protections - Over voltage protection | NA | | Yes | |
| Built-in protections - Short circuit current limitation | NA | | Internally Protected (Max 1.7 A Per output) | |
| Polarity inversion protection | NA | | Yes | |
| Isolation between power supply and outputs | NA | | None | |

| | MXR08D7 | MXR16D7 | MXS08D1 | MXS16D1 |
|---------------------------|---------|---------|--|---------|
| Isolation between outputs | NA | | None | |
| Wiring | NA | | PNP | |
| Status indicator | NA | | On LCD screen (Only on PLC with display) | |
| Cable length (Shielded) | NA | | Max. 30 meter | |

General & environment characteristics

| | | | | |
|---------------------------------------|--|--|--|--|
| Certifications | CE, cULus | | | |
| Environmental certifications | REACH, ROHS | | | |
| Conformity with the EMC directive | <ul style="list-style-type: none"> IEC/EN 61000-6-1 (Residential, commercial, and light-industrial environments) IEC/EN 61000-6-2 (Industrial) IEC/EN 61000-6-3 (Residential, commercial, and light-industrial environments) IEC/EN 61000-6-4 (Industrial) | | | |
| Protection rating | In accordance with IEC/EN 60529: <ul style="list-style-type: none"> IP40 on front panel IP20 on terminal block | | | |
| Overvoltage category | 2 in accordance with IEC/EN 60664-1 | | | |
| Pollution Degree | Degree 2 | | | |
| Max operating Altitude (m) | <ul style="list-style-type: none"> Operation: 2000 Transport: 3000 | | | |
| Mechanical resistance | <ul style="list-style-type: none"> Immunity to vibrations IEC/EN 60068-2-6, Test Fc Immunity to Shock IEC/EN 60068-2-27, 15 g peak, 11 ms duration | | | |
| Resistance to electrostatic discharge | IEC 61000-4-2 Level III (AD: ± 8 KV and CD: ± 4 KV), Criteria B | | | |
| Resistance to HF interference | <ul style="list-style-type: none"> Immunity to radiated electrostatic fields IEC 61000-4-3 Electrical fast transients IEC 61000-4-4 Surge IEC 61000-4-5 Conducted Susceptibility IEC 61000-4-6, Voltage dips As per IEC61131 -2 | | | |
| Conducted and radiated emissions | CISPR11 Class B | | | |
| Operating temperature | $-20 \rightarrow +55$ °C ($-4 \rightarrow 131$ °F) | | | |
| Storage temperature | $-30 \rightarrow +70$ °C ($-22 \rightarrow 158$ °F) | | | |
| Relative humidity | 10-95 % no condensing | | | |
| Screw terminals connection capacity | <ul style="list-style-type: none"> Euro type terminal Wire Size 1 x 24 to 12 (AWG) Solid wire Range: 1*2.5 mm² or 2*1.5 mm² Flexible wire Range: 1*2.5 mm² or 2*1.5 mm² | | | |
| Screw tightening Torque | 0.4 N. m. (3.54 lb. in) (Including earth terminal) | | | |
| Clearance and creepage | IEC 60664, IEC 61131-2, IEC 61010 | | | |

Mechanical Specifications

| | | | | |
|----------------------------|---|----------------|----------------|----------------|
| Mounting type | Base / Din-Rail Mounting | | | |
| Housing material | Polycarbonate | | | |
| Housing Color | Light Gray RAL 7035 (sole black RAL9011) | | | |
| Dimension (W x H x D) (mm) | 36 x 90 x 61.1 | 72 x 90 x 61.1 | 36 x 90 x 61.1 | 72 x 90 x 61.1 |
| Weight (g) | 120 | 210 | 95 | 165 |
| Enclosure type | 2 M | 4 M | 2 M | 4 M |
| DIN Rail mounting | Mounting in 35 mm symmetrical DIN rail (see installation sheet of instructions), compatible with modular enclosures | | | |
| Panel Mounting | Flat panel mounting by screws (see installation sheet of instructions) | | | |

LED Indication


| | |
|----------------------------|-----|
| Power/Status LED indicator | Yes |
|----------------------------|-----|

Product Dimensions


Front and Side

Digital Expansions DC

Version 35 mm

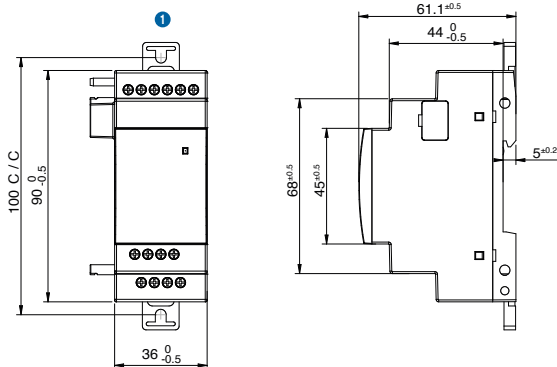

Version 70 mm

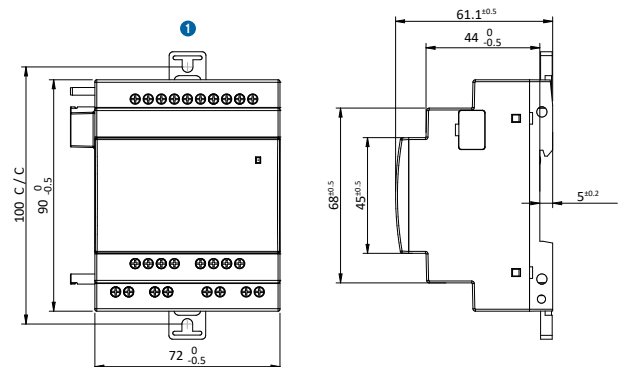

① Fixing Bracket

Electronic & Wiring Diagrams

Inputs


Digital Inputs (DC Voltage)

MXR08D7, MXS08D1 → Inputs I1...I4

MXR16D7, MXS16D1 → Inputs I1...I8



Electronic Diagram

I1 ... I8 0/1

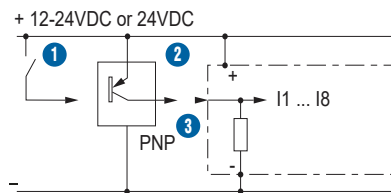

Wiring Diagram

12-24VDC or 24VDC

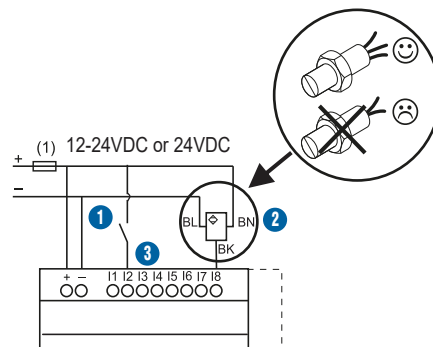

(1) 1A quick blowing fuse, circuit breaker, or circuit protector

BN: Brown cable of the 3-Wire PNP sensor

BL: Blue cable of the 3-Wire PNP sensor


BK: Black cable of the 3-Wire PNP sensor

Outputs


Relay Outputs

MXR08D7, MXR16D7

Electronic Diagram

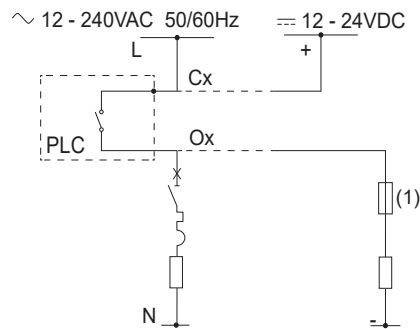

Wiring Diagram

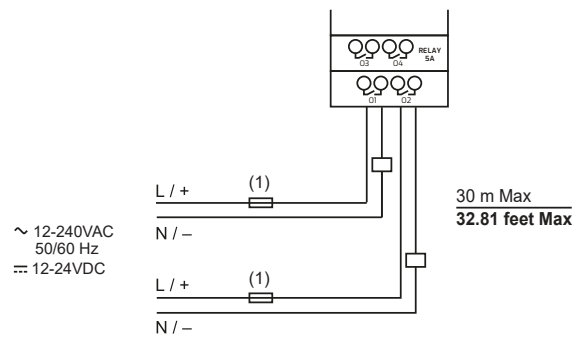


(1) Fuse, circuit breaker or current protector as per relay rating.
For 8A relay use 8A circuit breaker or current protector.
For 5A relay use 5A circuit breaker or current protector.

Outputs


Static / PWM Outputs

MXS08D1, MXS16D1

Electronic Diagram



Wiring Diagram

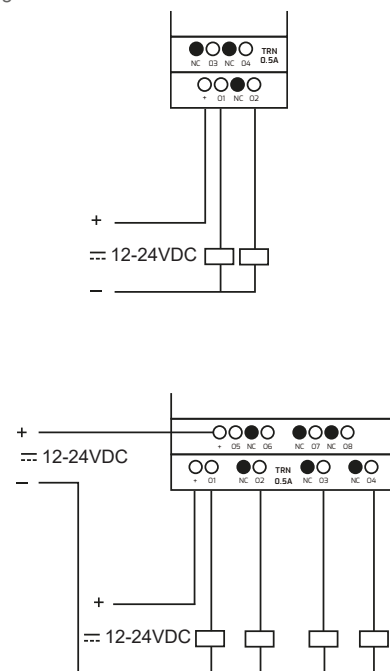

Warning:

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.