

DATA SHEET | ENGLISH



General data	
Display	Green LED: Operation display Red LED: Switching display
Setting options	Switch point via potentiometer
Operating medium	Filtered, dry or oiled air and non-corrosive gases
Protection class	IP40

Ordering information

1 - 01 - <u>XX XX</u> - 01 <u>XX</u> 00			
<u>Process connection</u>		<u>Pressure range</u>	
M5 thread	01	bar	psi
Tube connection 4 mm	06	-1...0	-14.5...0
		-1...1	-14.5...14.5
<u>Electrical connection</u>		<u>Output signal</u>	
3 m cable	04	NO	1
M8 3-pole	05	NC	2


Mechanical data	
Material housing	Plastic PC
Process connection	M5 thread; Tube connection 4 mm
Material process connection	Brass nickel-plated
Mounting position	Any (port downwards when using oiled air)
Weight	8 g

Electrical data	
Electrical connection	3 m cable with open ended wires; 10 cm cable with M8 3-pole
Operating voltage	9...30 VDC
Current consumption	< 20 mA
Short-circuit / reverse polarity protection	yes / yes

Output	
Output signal	1x PNP (NPN on request)
Max. output current	max. 100 mA
Output voltage	approx. Ub -1.5 V
Output function	NO; NC
Switch point	Adjustment potentiometer 100%
Switching hysteresis	approx. 5% FS
Repeatability	± 3% FS

Pressure range	
Measuring range	
(bar)	-1...0
(psi)	-14.5...0
max. overpressure*	
(bar)	2
(psi)	29

Operating conditions	
Operating temperature	Operation: -25°...+85°C
EMC / interference immunity	EN61000-6-2
EMC / interference emission	EN61000-6-4

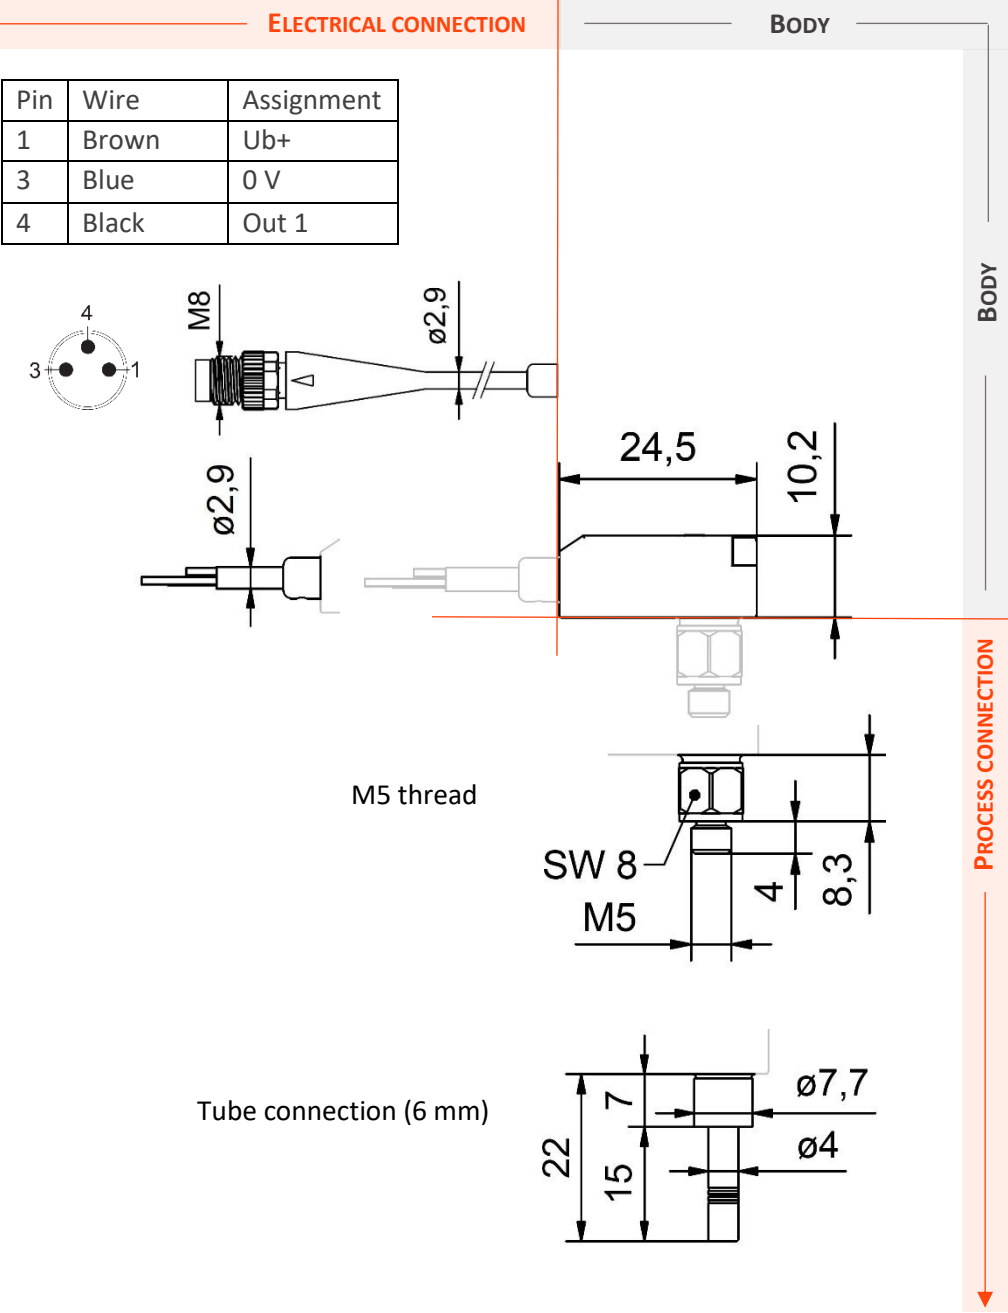

* overpressure not continuously allowed