


1


■ XCKJ  
fixed body with 1 cable entry

□ With head for linear movement (plunger)

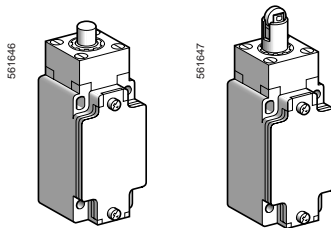

Page 1/104


□ With head for rotary movement (lever)

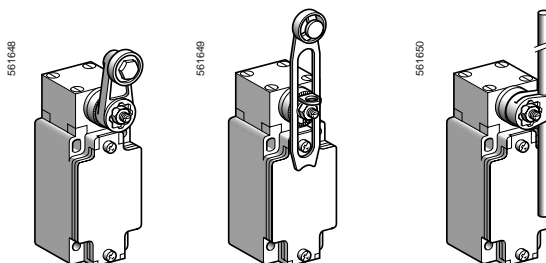

Page 1/104


■ XCKJ  
plug-in body with 1 cable entry

□ With head for linear movement (plunger)

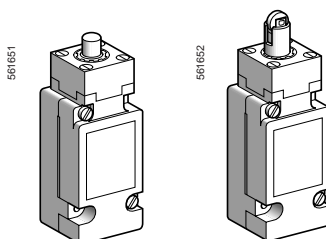

Page 1/106

□ With head for rotary movement (lever)

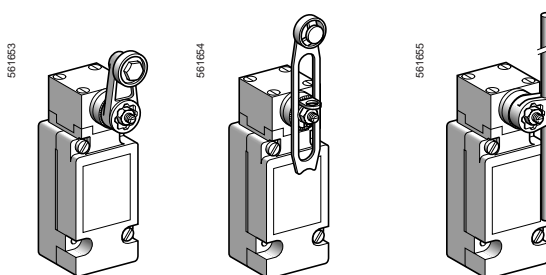

Page 1/106

## Environment characteristics

Conformity to standards	Products	IEC 60947-5-1, EN 60947-5-1, UL 508, CSA C22-2 n° 14
	Machine assemblies	IEC 60204-1, EN 60204-1
Product certifications		UL, CSA, CCC, BV, GOST
Protective treatment	Version	Standard: "TC", special: "TH"
Ambient air temperature	For operation	- 25...+ 70°C, special sub-assemblies for use at - 40°C or + 120°C
	For storage	- 40...+ 70°C
Vibration resistance	Conforming to IEC 60068-2-6	25 gn (10...500 Hz)
Shock resistance	Conforming to IEC 60068-2-27	50 gn (11 ms)
Electric shock protection		Class I conforming to IEC 61140 and NF C 20-030
Degree of protection		IP 66 conforming to IEC 60529; IK 07 conforming to EN 50102
Repeat accuracy		0.01 mm on the tripping points, with 1 million operating cycles for head with end plunger
Cable entry or connector	Depending on model	Tapped entry for Pg 13.5 cable gland, tapped ISO M20 x 1.5 or tapped 1/2" NPT, or M12 connector
Materials		Bodies and heads in Zamak

## Contact block characteristics


Rated operational characteristics	XE2●P	~ AC-15; A300 (Ue = 240 V, Ie = 3 A); Ithe = 10 A ∩ DC-13; Q300 (Ue = 250 V, Ie = 0.27 A), conforming to IEC 60947-5-1 Appendix A, EN 60947-5-1
	XE3●P	~ AC-15; B300 (Ue = 240 V, Ie = 1.5 A); Ithe = 6 A ∩ DC-13; R300 (Ue = 250 V, Ie = 0.1 A), conforming to IEC 60947-5-1 Appendix A, EN 60947-5-1
Rated insulation voltage	XE2●P	Ui = 500 V degree of pollution 3 conforming to IEC 60947-1 Ui = 300 V conforming to UL 508, CSA C22-2 n° 14
	XE3●P	Ui = 400 V degree of pollution 3 conforming to IEC 60947-1 Ui = 300 V conforming to UL 508, CSA C22-2 n° 14
Rated impulse withstand voltage	XE2●P	U imp = 6 kV conforming to IEC 60947-1, IEC 60664
	XE3●P	U imp = 4 kV conforming to IEC 60947-1, IEC 60664
Positive operation (depending on model)		NC contacts with positive opening operation conforming to IEC 60947-5-1 Appendix K, EN 60947-5-1
Resistance across terminals		≤ 25 mΩ conforming to IEC 60255-7 category 3
Short-circuit protection	XE2●P	10 A cartridge fuse type gG (gl)
	XE3●P	6 A cartridge fuse type gG (gl)
Connection (screw clamp terminals)	XE2SP21●1	Clamping capacity, min: 1 x 0.34 mm <sup>2</sup> , max: 2 x 1.5 mm <sup>2</sup>
	XE2NP21●1	Clamping capacity, min: 1 x 0.5 mm <sup>2</sup> , max: 2 x 2.5 mm <sup>2</sup>
	XCKJ plug-in and XESP20●1	Clamping capacity, min: 1 x 0.75 mm <sup>2</sup> , max: 2 x 1.5 mm <sup>2</sup>
	XE3NP and XE3SP	Clamping capacity, min: 1 x 0.34 mm <sup>2</sup> , max: 1 x 1 mm <sup>2</sup> or 2 x 0.75 mm <sup>2</sup>
Minimum actuation speed		<b>XE2SP21●1 and XE3SP:</b> 0.01 m/minute
		<b>XE2NP21●1 and XE3NP:</b> 6 m/minute

### Electrical durability


- Conforming to IEC 60947-5-1 Appendix C
- Utilisation categories AC-15 and DC-13
- Maximum operating rate: 3600 operating cycles/hour
- Load factor: 0.5

**XE2SP21●1, XE2SP2141**


AC supply  
50/60 Hz ~  
mm inductive circuit

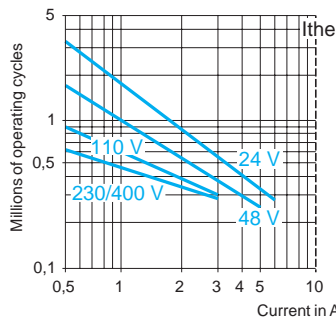

**XE2NP21●1**

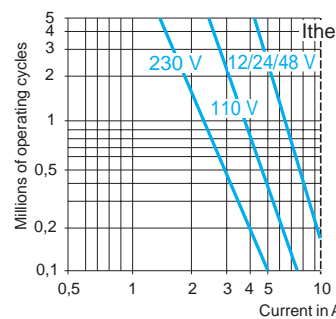

**XCK J plug-in, XES P20●1**

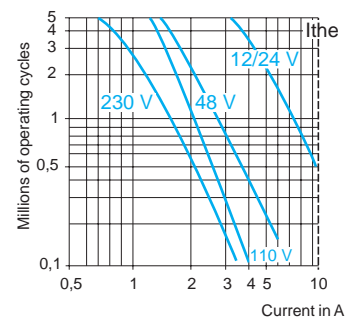

DC supply ∩

Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	10	7	4

Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	13	9	7


Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	10	7	4


For XE2S P● 151 on ~ or ∩, NC and NO contacts simultaneously loaded to the values shown with reverse polarity.

**XE3SP●●●●**

AC supply  
50/60 Hz ~  
mm inductive circuit

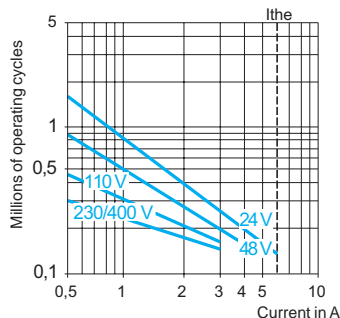

**XE3NP●●●●**

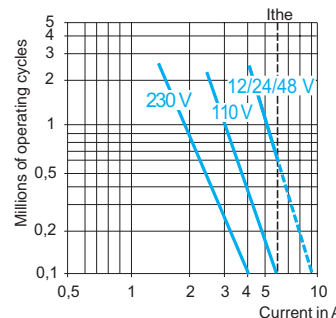

DC supply ∩

Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	3	2	1

Power broken in W for 5 million operating cycles.

Voltage V	24	48	120
mm W	4	3	2

# Limit switches

OsiSense XC Standard  
Industrial format EN 50041

Metal, conforming to CENELEC EN 50041, type XCKJ  
Complete fixed body switches with 1 cable entry

Type of head	Plunger (fixing by the body)		Rotary (fixing by the body) (switches supplied for actuation from left AND right)			
	Form B (1)	Form C (1)	Form A (1)		Form D (1)	
Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever (2)	Steel roller lever (2)	Variable length thermoplastic roller lever (2)	Round thermoplastic rod lever, Ø 6 mm (2) (4)

## References of complete switches with 1 ISO M20 x 1.5 cable entry (3)

	<b>2-pole NC + NO snap action (XE2SP2151)</b>	<b>XCKJ161H29</b> 	<b>XCKJ167H29</b> 	<b>XCKJ10511H29</b> 	<b>XCKJ10513H29</b> 	<b>XCKJ10541H29</b> 	<b>XCKJ10559H29</b> 
	<b>2-pole NC + NO break before make, slow break (XE2NP2151)</b>	<b>XCKJ561H29</b> 	<b>XCKJ567H29</b> 	<b>XCKJ50511H29</b> 	<b>XCKJ50513H29</b> 	<b>XCKJ50541H29</b> 	<b>XCKJ50559H29</b> 
	<b>2-pole NC + NC simultaneous, slow break (XE2SP2141)</b>	<b>ZCKJ9H29 + ZCKE61</b> 	<b>ZCKJ9H29 + ZCKE67</b> 	<b>ZCKJ9H29 + ZCKE05 + ZCKY11</b> 	<b>ZCKJ9H29 + ZCKE05 + ZCKY13</b> 	<b>ZCKJ9H29 + ZCKE05 + ZCKY41</b> 	<b>ZCKJ9H29 + ZCKE05 + ZCKY59</b> 
	<b>2-pole NC + NC simultaneous, slow break (XE2NP2141)</b>	<b>ZCKJ7H29 + ZCKE61</b> 	<b>ZCKJ7H29 + ZCKE67</b> 	<b>ZCKJ7H29 + ZCKE05 + ZCKY11</b> 	<b>ZCKJ7H29 + ZCKE05 + ZCKY13</b> 	<b>ZCKJ7H29 + ZCKE05 + ZCKY41</b> 	<b>ZCKJ7H29 + ZCKE05 + ZCKY59</b> 
	<b>3-pole NC + NC + NO snap action (XE3SP2141)</b>	<b>ZCKJD39H29 + ZCKE61</b> 	<b>ZCKJD39H29 + ZCKE67</b> 	<b>ZCKJD39H29 + ZCKE05 + ZCKY11</b> 	<b>ZCKJD39H29 + ZCKE05 + ZCKY13</b> 	<b>ZCKJD39H29 + ZCKE05 + ZCKY41</b> 	<b>ZCKJD39H29 + ZCKE05 + ZCKY59</b> 
	<b>3-pole NC + NC + NO break before make, slow break (XE3NP2141)</b>	<b>ZCKJD37H29 + ZCKE61</b> 	<b>ZCKJD37H29 + ZCKE67</b> 	<b>ZCKJD37H29 + ZCKE05 + ZCKY11</b> 	<b>ZCKJD37H29 + ZCKE05 + ZCKY13</b> 	<b>ZCKJD37H29 + ZCKE05 + ZCKY41</b> 	<b>ZCKJD37H29 + ZCKE05 + ZCKY59</b> 
<b>Weight (kg)</b>	0.430	0.455	0.480	0.490	0.485	0.485	0.485
<b>Contact operation</b>	closed open		(A) = cam displacement (P) = positive opening point		NC contact with positive opening operation		

## References of complete switches with 1 Pg 13.5 cable entry (2)

For complete switches with entry for Pg 13.5 cable gland, delete H29 from the end of the reference. Example: XCKJ161H29 becomes XCKJ161.

## References of complete switches with 1 entry for 1/2" NPT conduit (2)

For complete switches with entry for 1/2" NPT (USAS B2-1) conduit, replace H29 at the end of the reference by H7. Example: XCKJ161H29 becomes XCKJ161H7.

(1) Form conforming to EN 50041, see page 1/137.

(2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.

(3) Switches with gold contacts or eyelet type connections: please consult our Customer Care Centre.

(4) Value taken with actuation by moving part at 100 mm from the fixing.

# Limit switches

OsiSense XC Standard

Industrial format EN 50041

Metal, conforming to CENELEC EN 50041, type XCKJ

Complete fixed body switches with 1 cable entry

## Characteristics

<b>Switch actuation</b>	On end	By 30° cam			By any moving part
<b>Type of actuation</b>					
<b>Maximum actuation speed</b>	0.5 m/s	1 m/s	1.5 m/s		
<b>Mechanical durability (1)</b> (in millions of operating cycles)	30	25	30		
<b>Minimum force or torque</b>	For tripping For positive opening	20 N 50 N	16 N 40 N	0.25 N.m 0.50 N.m	-
<b>Cable entry (3)</b>	1 entry tapped M20 x 1.5 mm for ISO cable gland, clamping capacity 9 to 12 mm				


(1) Limited to 15 million operating cycles for switches with contacts XE3●P.

## Dimensions

**XCKJ●61H29**  
**ZCKJ● + ZCKE61**


**XCKJ●67H29**  
**ZCKJ● + ZCKE67**

**XCKJ●051●H29**  
**ZCKJ● + ZCKE05 + ZCKY11 or Y13**

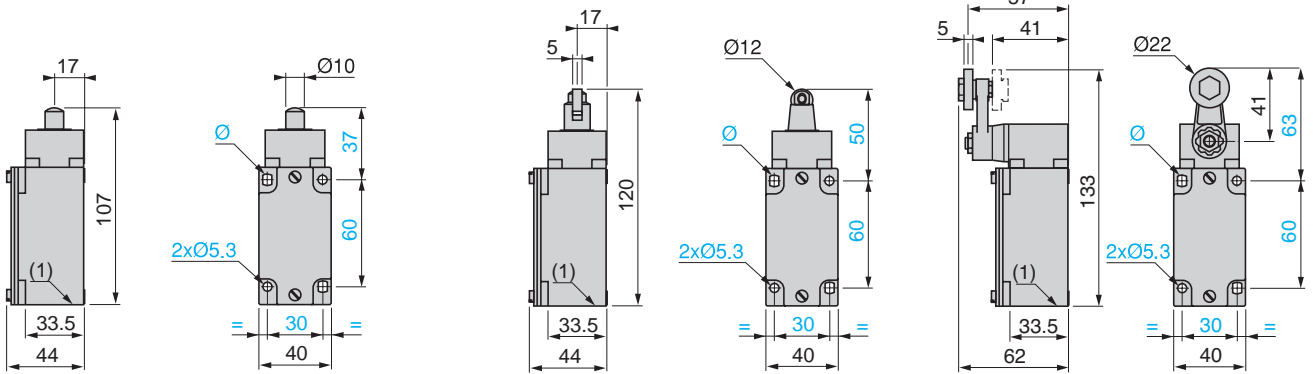

**XCKJ●0541H29**  
**ZCKJ● + ZCKE05 + ZCKY41**

**XCKJ●0559H29**  
**ZCKJ● + ZCKE05 + ZCKY59**

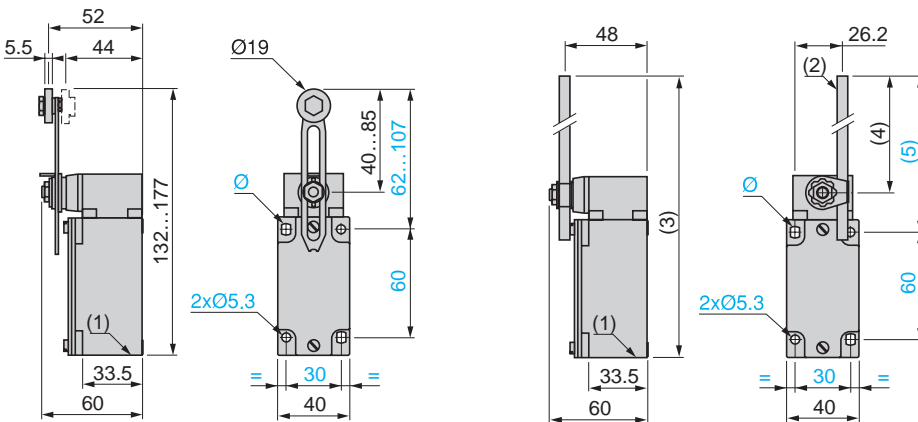

(1) 1 tapped entry for ISO M20 x 1.5 or Pg 13.5 cable gland or tapped 1/2" NPT.

(2) Ø 6 rod, length 200 mm.

(3) 282 max.







(4) 190 max.

(5) 212 max.










Ø: 2 elongated holes Ø 5.3 x 7.3.

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Complete switches, plug-in body  
With 1 cable entry

Type of head	Plunger (fixing by the body)		Rotary (fixing by the body) (switches supplied for actuation from left AND right)			
	Form B (1)	Form C (1)	Form A (1)		Form D (1)	
						
Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever (2)	Steel roller lever (2)	Variable length thermoplastic roller lever (2)	Round thermoplastic rod lever, Ø 6 mm (2) (4)

References of complete switches with 1 ISO M20 x 1.5 cable entry (3)						
 Single-pole CO snap action	XCKJ1161H29	XCKJ1167H29	XCKJ110511H29	XCKJ110513H29	XCKJ110541H29	XCKJ110559H29
						
Weight (kg)	0.430	0.455	0.480	0.490	0.485	0.485
Contact operation	 closed  open		(A) = cam displacement			





## References of complete switches with 1 Pg 13.5 cable entry (3)

For complete switches with entry for Pg 13.5 cable gland, delete **H29** from the end of the reference.  
Example: **XCKJ1161H29** becomes **XCKJ1161**.

## References of complete switches with 1 entry for 1/2" NPT conduit (3)

For complete switches with entry for 1/2" NPT (USAS B2-1) conduit, replace **H29** at the end of the reference by **H7**.  
Example: **XCKJ1161H29** becomes **XCKJ1161H7**.

## Characteristics

Switch actuation	On end	By 30° cam		By any moving part
Type of actuation				
Maximum actuation speed	0.5 m/s	1 m/s	1.5 m/s	
Mechanical durability (in millions of operating cycles)	30	25	30	
Minimum tripping force or torque	20 N	16 N	0.25 N.m	
Cable entry	1 entry tapped M20 x 1.5 for ISO cable gland Clamping capacity 7 to 13 mm			

(1) Form conforming to EN 50041, see page 1/137.

(2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.


(3) Switches with gold contacts: please consult our Customer Care Centre.

(4) Value taken with actuation by moving part at 100 mm from the fixing.


# Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Complete switches, plug-in body  
 With 1 cable entry


XCKJ1611H29

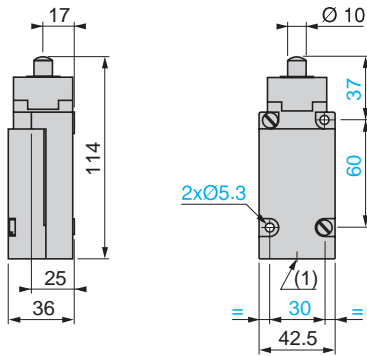


XCKJ1167H29

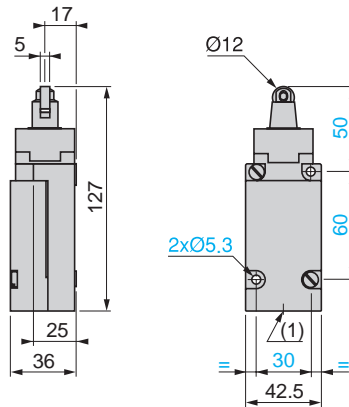


XCKJ110511H29, XCKJ110513H29

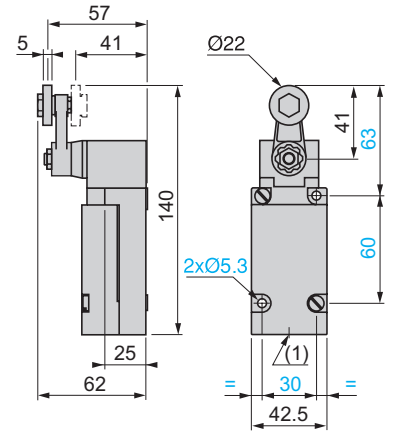

XCKJ110541H29

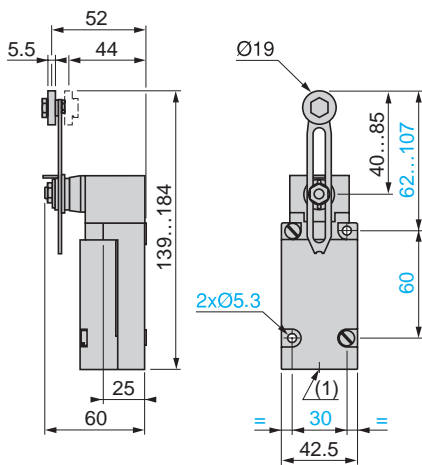

XCKJ110559H29

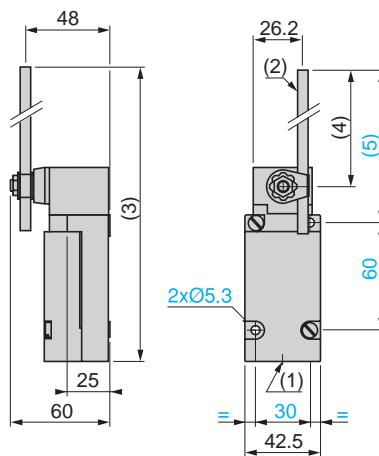

(1) 1 tapped entry for ISO M20 x 1.5 or Pg 13.5 cable gland or for 1/2" NPT conduit.

(2) Ø 6 rod, length 200 mm.







(3) 289 max.









(4) 190 max.






(5) 212 max.

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Complete switches, fixed body  
M12 connector

Type of head	Plunger (fixing by the body)		Rotary (fixing by the body) (switches supplied for actuation from left AND right)			
	Form B (1)	Form C (1)	Form A (1)		Form D (1)	
						
Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever (2)	Steel roller lever (2)	Variable length thermoplastic roller lever (2)	Round thermoplastic rod lever, Ø 6 mm (2) (3)

References (4)	XCKJ161D	XCKJ167D	XCKJ10511D	XCKJ10513D	XCKJ10541D	XCKJ10559D
 2-pole NC + NO snap action (XE2S P2151)	 2 4.7(P) 0 6mm 0.9	 3.2(A) 8.1(P) 0 1.5 mm	 23° 58°(P) 0 11° 90°	 23° 58°(P) 0 11° 90°	 23° 0 11° 90°	 23° 0 11° 90°
Weight (kg)	0.430	0.455	0.480	0.490	0.485	0.485
Contact operation	 closed open		(A) = cam displacement (P) = positive opening point			

Characteristics					
Switch actuation	On end	By 30° cam			By any moving part
Type of actuation					
Maximum actuation speed	0.5 m/s	1 m/s	1.5 m/s		
Mechanical durability (in millions of operating cycles)	30	25	30		
Minimum force or torque	For tripping	20 N	16 N	0.25 N.m	
	For positive opening	50 N	40 N	0.50 N.m	
Connection	M12 connector, U <sub>i</sub> = 60 V, I <sub>e</sub> = 4 A (see suitable pre-wired female connectors below).				

(1) Form conforming to EN 50041, see page 1/137.  
 (2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.  
 (3) Value taken with actuation by moving part at 100 mm from the fixing.  
 (4) Switches with gold contacts: please consult our Customer Care Centre.


References of suitable pre-wired female connectors					
Type of connector	M12 straight, 5-pin, 4 A/24 V max.			M12 elbowed, 5-pin, 4 A/24 V max.	
With cable, Ø 5.8 mm (4 x 0.34 mm <sup>2</sup> + 1 x 0.5 mm <sup>2</sup> )	L = 2 m	XZCP1164L2		XZCP1264L2	
	L = 5 m	XZCP1164L5		XZCP1264L5	
	L = 10 m	XZCP1164L10		XZCP1264L10	
Weight (kg)	L = 2 m	0.115			
	L = 5 m	0.270			
	L = 10 m	0.520			

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Complete switches, fixed body  
M12 connector

## Dimensions


XCKJ161D

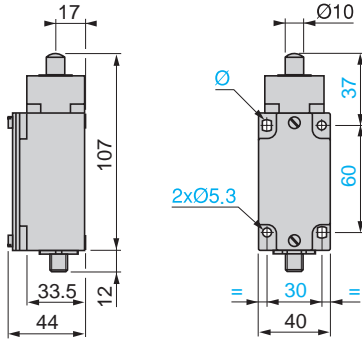


XCKJ167D

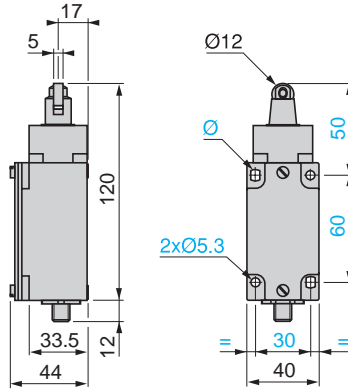


XCKJ1051●D

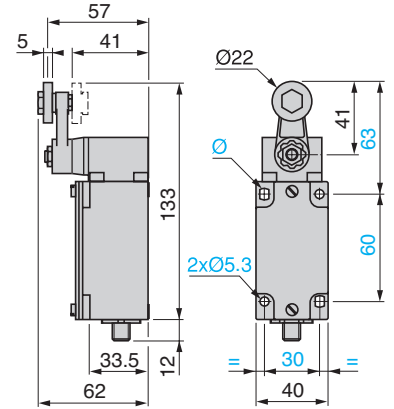


XCKJ10541D

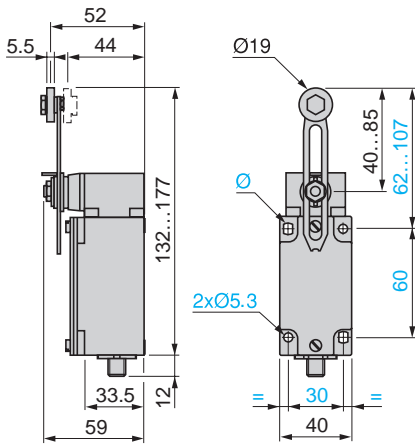


XCKJ10559D

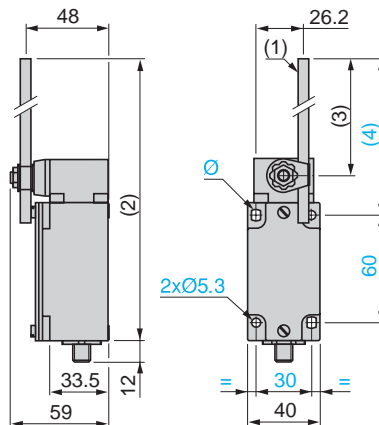

XZCP1164L●




XZCP1264L●

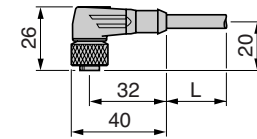

- (1) Ø 6 rod, length 200 mm.
- (2) 282 max.
- (3) 190 max.
- (4) 212 max.
- Ø: 2 elongated holes Ø 5.3 x 7.3.
- L: Cable length 2, 5 or 10 m.


## Connections

Limit switch XCKJ●●●●D



1-2 = NC  
3-4 = NO  
5 =  $\perp$   
4 A / 24 V max.

Pre-wired female connector XZCP1●64L●









1 = brown  
2 = white  
3 = blue  
4 = black  
5 =  $\perp$  yellow/green












# Limit switches





OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Complete switches, fixed body  
7/8"-16UN connector

Type of head	Plunger (fixing by the body)		Rotary (fixing by the body) (switches supplied for actuation from left AND right)			
	Form B (1)	Form C (1)	Form A (1)		Form D (1)	
						
Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever (2)	Steel roller lever (2)	Variable length thermoplastic roller lever (2)	Round thermoplastic rod lever, Ø 6 mm (2) (3)

## References (4)

2-pole NC + NO snap action (XE2SP2151)	XCKJ161A	XCKJ167A	XCKJ10511A	XCKJ10513A	XCKJ10541A	XCKJ10559A
						
Weight (kg)	0.430	0.455	0.480	0.490	0.485	0.485
Contact operation	 closed  open		(A) = cam displacement (P) = positive opening point		 NC contact with positive opening operation	

## Characteristics

Switch actuation	On end	By 30° cam		By any moving part
Type of actuation				
Maximum actuation speed	0.5 m/s	1 m/s	1.5 m/s	
Mechanical durability (in millions of operating cycles)	30	25	30	
Minimum force or torque	For tripping: 20 N For positive opening: 50 N	16 N 40 N	0.25 N.m 0.50 N.m	-
Connection	7/8"-16UN connector, U <sub>i</sub> = 250 V; I <sub>e</sub> = 6 A (see suitable pre-wired female connectors below).			

- (1) Form conforming to EN 50041, see page 1/137.  
 (2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.  
 (3) Value taken with actuation by moving part at 100 mm from the fixing.  
 (4) Switches with gold contacts: please consult our Customer Care Centre.

## References of suitable pre-wired female connectors


Type of connector	7/8"-16UN straight, 5-pin, 4 A/250 V max.	
With cable, Ø 5.9 mm (5 x 0.34 mm <sup>2</sup> )	L = 2 m	XZCP1764L2
	L = 5 m	XZCP1764L5
	L = 10 m	XZCP1764L10
Weight (kg)	L = 2 m	0.185
	L = 5 m	0.460
	L = 10 m	0.900

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Complete switches, fixed body  
7/8"-16UN connector

## Dimensions


XCKJ161A

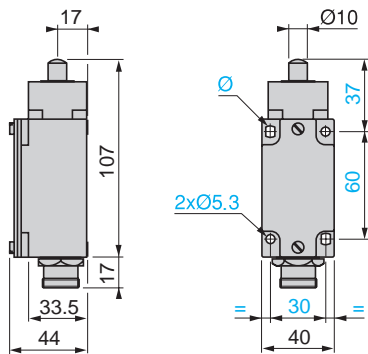


XCKJ167A

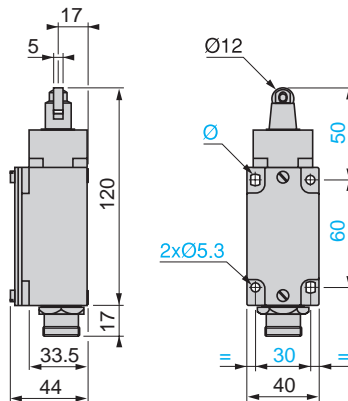


XCKJ1051●A

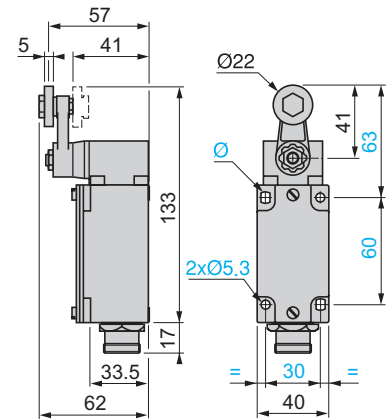


XCKJ10541A

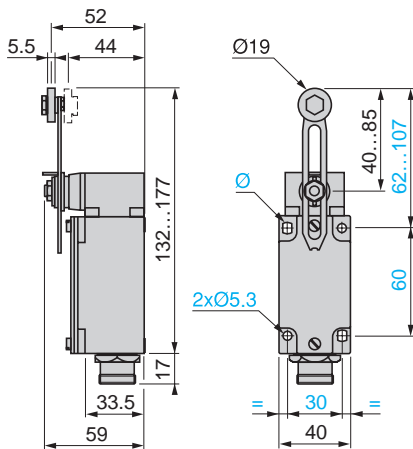

XCKJ10559A

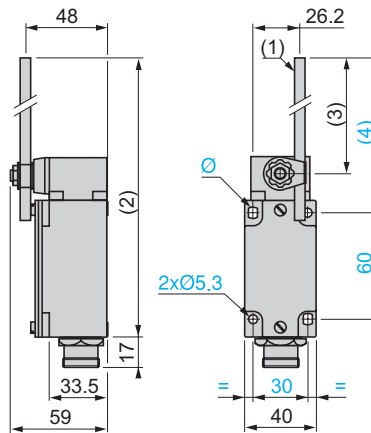


XZCP1764L●

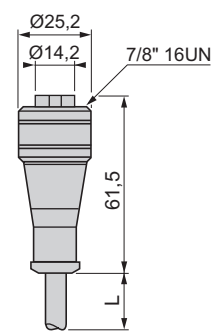


- (1) Ø 6 rod, length 200 mm.
- (2) 282 max.
- (3) 190 max.
- (4) 212 max.
- Ø: 2 elongated holes Ø 5.3 x 7.3.
- L: Cable length 2, 5 or 10 m.

## Connections

Limit switch XCKJ●●●●A

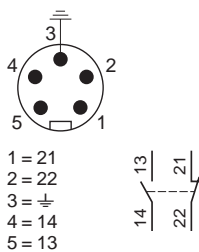


Pre-wired female connector XZCP1764L●

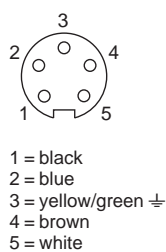

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Variable composition: standard bodies

1

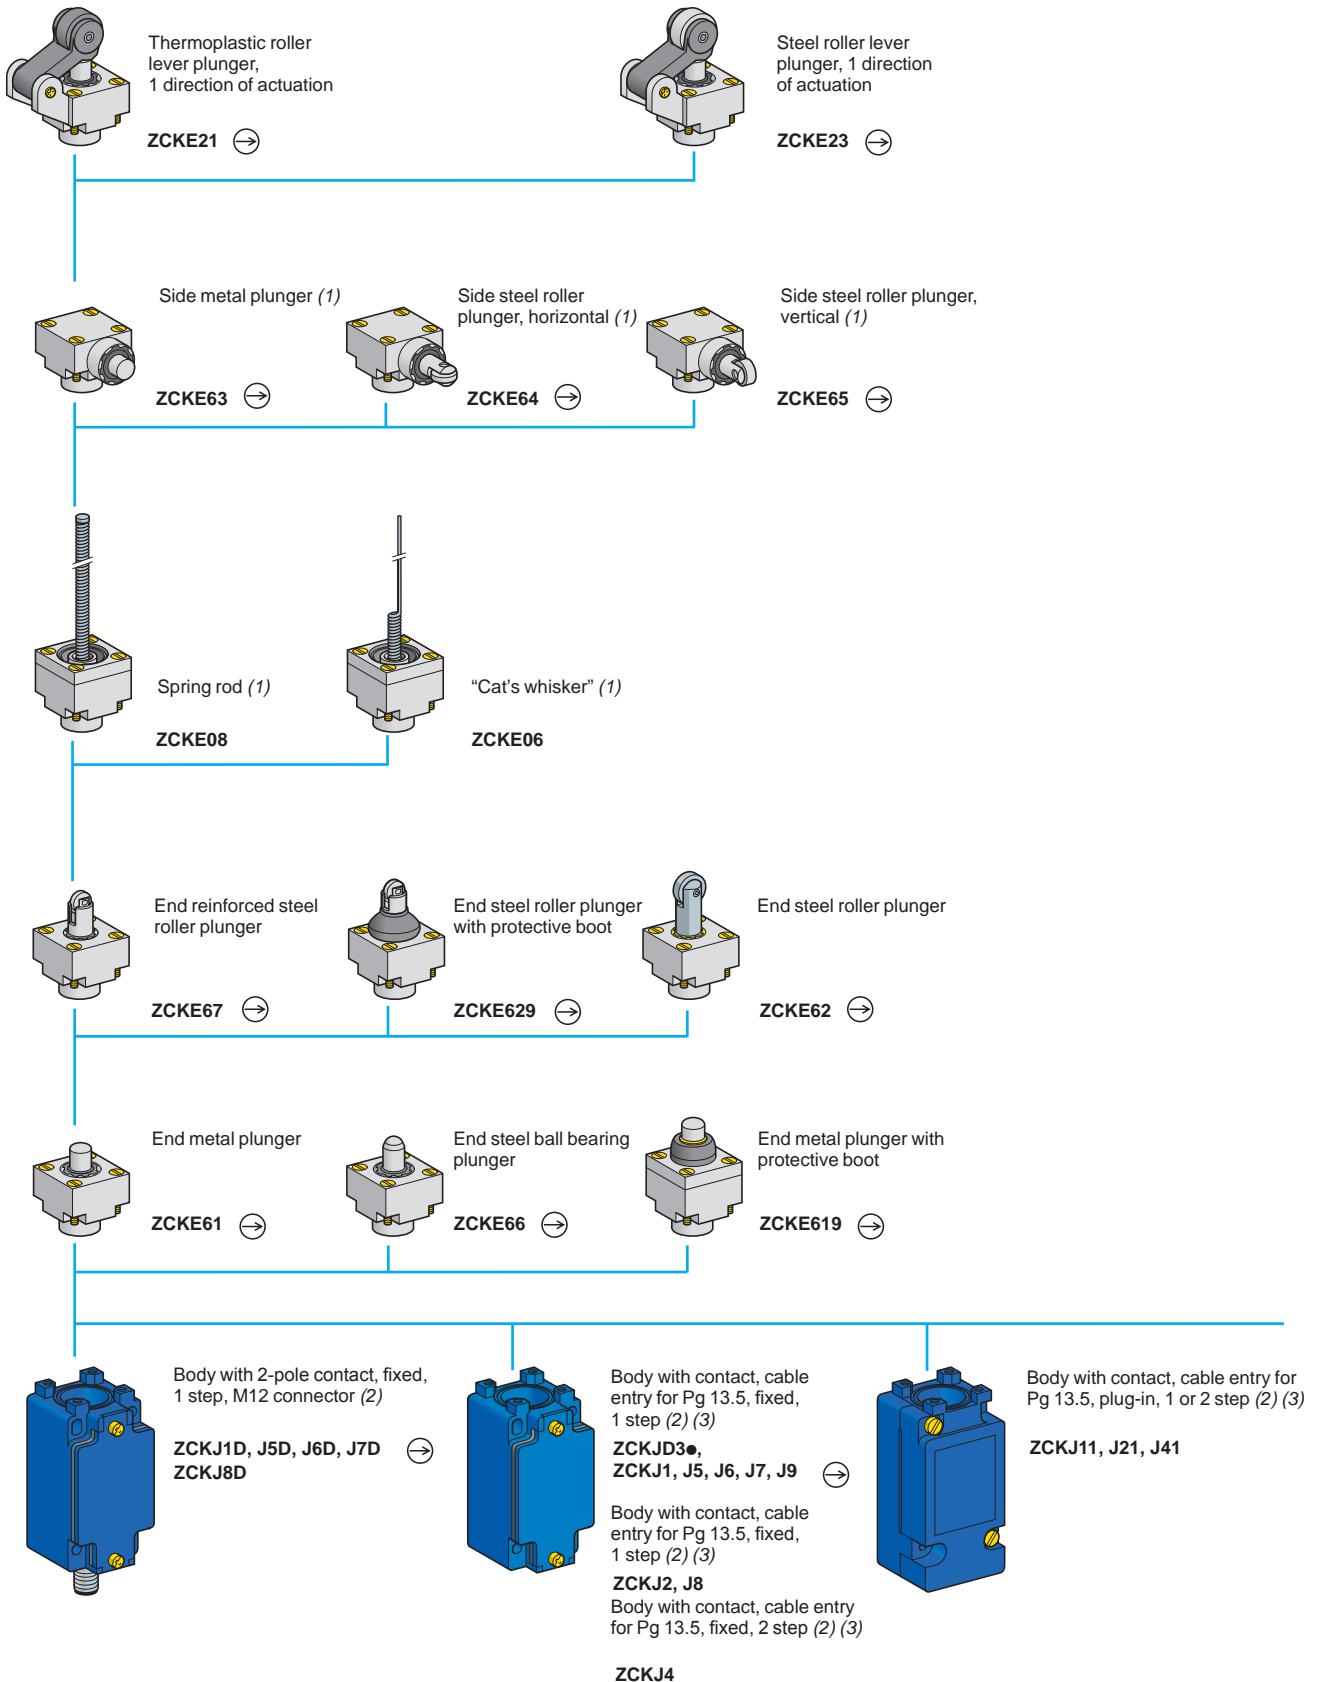

(1) Cannot be used with bodies ZCKJ4 and ZCKJ41.


(2) For further information, see page 1/114.

(3) For a cable entry tapped ISO M20 x 1.5, add H29 to the reference. Example: ZCKJ1 becomes ZCKJ1H29.

For a cable entry tapped 1/2" NPT, add H7 to the reference. Example: ZCKJ1 becomes ZCKJ1H7.

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Variable composition: standard bodies

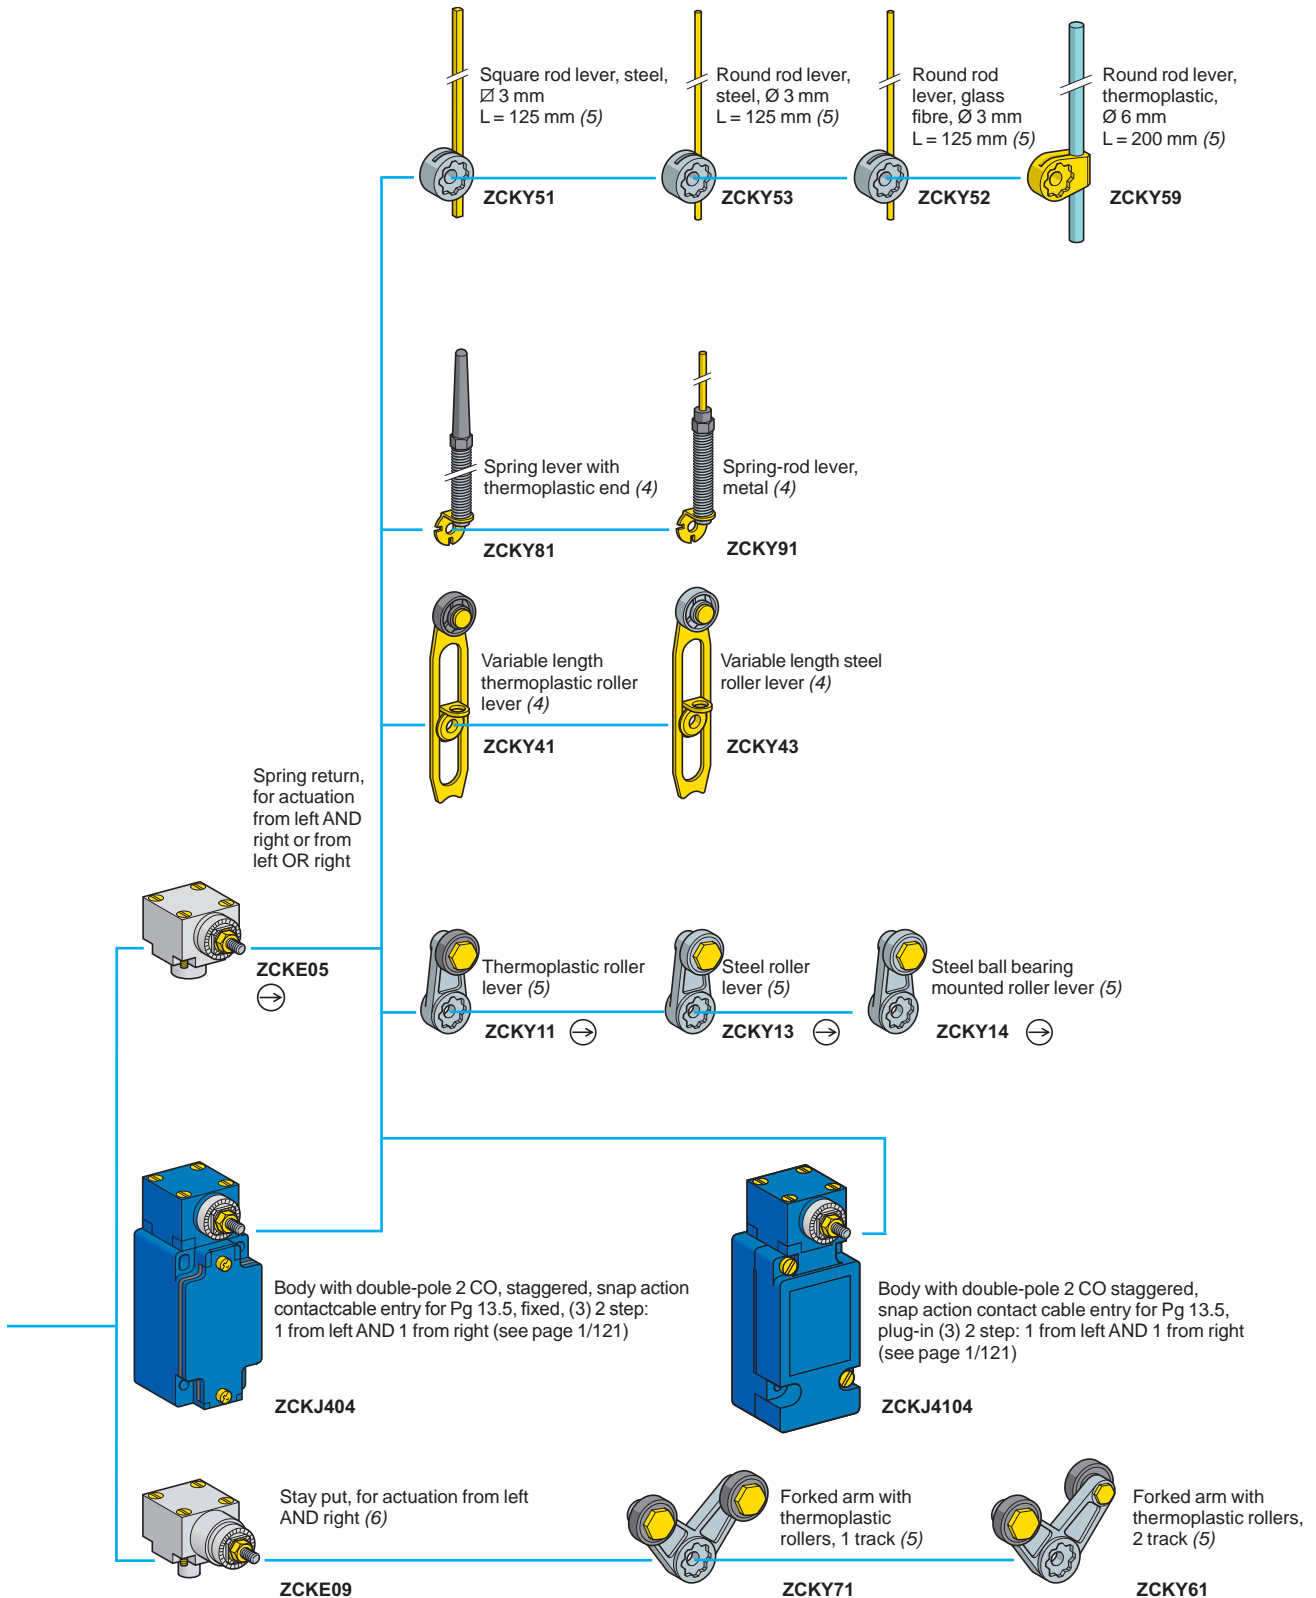

⊞ : head assuring positive opening operation.

(4) Adjustable throughout 360° in 5° steps, or in 90° steps by reversing the notched washer.  
 (5) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever mounting.  
 (6) Suitable for bodies with contacts ZCKJ1●, J2●, J31, J39.


# Limit switches

OsiSense XC Standard, industrial format EN 50041

Metal, conforming to CENELEC EN 50041, type XCKJ

Fixed or plug-in body

Adaptable sub-assemblies: standard bodies



ZCKJ●

## Fixed bodies with 2-pole contact

Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
1 step	1 NC + 1 NO snap action (XE2SP2151)		⊕	Pg 13.5	<b>ZCKJ1</b>	0.310
				ISO M20 x 1.5	<b>ZCKJ1H29</b>	0.310
	2 CO simultaneous, snap action (XESP2021)		-	Pg 13.5	<b>ZCKJ2</b>	0.310
				ISO M20 x 1.5	<b>ZCKJ2H29</b>	0.310
	1 NC + 1 NO break before make, slow break (XE2NP2151)		⊕	Pg 13.5	<b>ZCKJ5</b>	0.310
				ISO M20 x 1.5	<b>ZCKJ5H29</b>	0.310
	1 NO + 1 NC make before break, slow break (XE2NP2161)		⊕	Pg 13.5	<b>ZCKJ6</b>	0.310
			ISO M20 x 1.5	<b>ZCKJ6H29</b>	0.310	
2 NC simultaneous, slow break (XE2NP2141)		⊕	Pg 13.5	<b>ZCKJ7</b>	0.310	
			ISO M20 x 1.5	<b>ZCKJ7H29</b>	0.310	
2 NO simultaneous, slow break (XE2NP2131)		-	Pg 13.5	<b>ZCKJ8</b>	0.310	
			ISO M20 x 1.5	<b>ZCKJ8H29</b>	0.310	
2 NC snap action (XE2SP2141)		⊕	Pg 13.5	<b>ZCKJ9</b>	0.310	
			ISO M20 x 1.5	<b>ZCKJ9H29</b>	0.310	
2 step	2 CO staggered snap action (XESP2031)		-	Pg 13.5	<b>ZCKJ4</b>	0.310
				ISO M20 x 1.5	<b>ZCKJ4H29</b>	0.310


## Fixed bodies with 3-pole contact

Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
-	1 NC + 2 NO snap action (XE3SP2151)		⊕	Pg 13.5	<b>ZCKJD31</b>	0.310
				ISO M20 x 1.5	<b>ZCKJD31H29</b>	0.310
	2 NC + 1 NO snap action (XE3SP2141)		⊕	Pg 13.5	<b>ZCKJD39</b>	0.310
				ISO M20 x 1.5	<b>ZCKJD39H29</b>	0.310
2 NC + 1 NO break before make, slow break (XE3NP2141)		⊕	Pg 13.5	<b>ZCKJD37</b>	0.310	
			ISO M20 x 1.5	<b>ZCKJD37H29</b>	0.310	
1 NC + 2 NO break before make, slow break (XE3NP2151)		⊕	Pg 13.5	<b>ZCKJD35</b>	0.310	
			ISO M20 x 1.5	<b>ZCKJD35H29</b>	0.310	

(1) ⊕: NC contact with positive opening operation.

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies: standard bodies



ZCKJ01

### Plug-in bodies with contact


Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
1 step	Single-pole 1 CO snap action		-	Pg 13.5	<b>ZCKJ11</b>	0.300
				ISO M20 x 1.5	<b>ZCKJ11H29</b>	0.300
				1/2" NPT	<b>ZCKJ11H7</b>	0.300
2 step	Double-pole 2 CO simultaneous, snap action		-	Pg 13.5	<b>ZCKJ21</b>	0.300
				ISO M20 x 1.5	<b>ZCKJ21H29</b>	0.300
				1/2" NPT	<b>ZCKJ21H7</b>	0.300
2 step	Double-pole 2 CO staggered, snap action		-	Pg 13.5	<b>ZCKJ41</b>	0.300
				ISO M20 x 1.5	<b>ZCKJ41H29</b>	0.300
				1/2" NPT	<b>ZCKJ41H7</b>	0.300

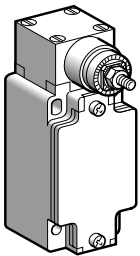

ZCKJ404

### Bodies with contact, with rotary head (without operating lever)

Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>Fixed body</b>						
2 step 1 from left AND 1 from right (see page 1/125)	Double-pole 2 CO staggered, snap action		-	Pg 13.5	<b>ZCKJ404</b>	0.455
				ISO M20 x 1.5	<b>ZCKJ404H29</b>	0.455
				1/2" NPT	<b>ZCKJ404H7</b>	0.455
<b>Plug-in body</b>						
2 step 1 from left AND 1 from right (see page 1/125)	Double-pole 2 CO staggered, snap action		-	Pg 13.5	<b>ZCKJ4104</b>	0.465
				ISO M20 x 1.5	<b>ZCKJ4104H29</b>	0.465
				1/2" NPT	<b>ZCKJ4104H7</b>	0.465

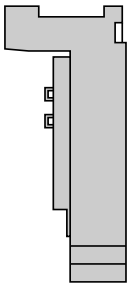

ZCKJ01

### Plug-in housing only


Description	For use with	Contacts	Reference	Weight kg
<b>Single-pole 1 CO</b> with positive opening operation	ZCKJ11	Silver	<b>ZCKJ01</b>	0.150
<b>Double-pole 2 CO</b> with positive opening operation	ZCKJ21	Silver	<b>ZCKJ02</b>	0.160
<b>Double-pole 2 CO staggered</b>	ZCKJ41	Silver	<b>ZCKJ04</b>	0.160

(1) : NC contact with positive opening operation.

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Fixed or plug-in body. Adaptable sub-assemblies:  
bodies with indicator light module

1




ZCKJ...●●●

## Fixed bodies with 2-pole contact

Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>With module comprising 1 LED, 24 V <math>\overline{\text{---}}</math></b>						
1 step	1 NC + 1 NO snap action (XE2SP2151)			Pg 13.5	<b>ZCKJ120</b>	0.320
	1 NC + 1 NO break before make, slow break (XE2NP2151)			Pg 13.5	<b>ZCKJ520</b>	0.320
<b>With module comprising 2 LEDs, 24 V <math>\overline{\text{---}}</math></b>						
1 step	1 NC + 1 NO snap action (XE2SP2151)			Pg 13.5 ISO M20 x 1.5	<b>ZCKJ121</b> <b>ZCKJ121H29</b>	0.320 0.320
	1 NC + 1 NO break before make, slow break (XE2NP2151)			Pg 13.5 ISO M20 x 1.5	<b>ZCKJ521</b> <b>ZCKJ521H29</b>	0.320 0.320
<b>With module comprising 2 LEDs, 110/240 V <math>\sim</math></b>						
1 step	1 NC + 1 NO snap action (XE2SP2151)			Pg 13.5 ISO M20 x 1.5	<b>ZCKJ134</b> <b>ZCKJ134H29</b>	0.320 0.320
	1 NC + 1 NO break before make, slow break (XE2NP2151)			Pg 13.5 ISO M20 x 1.5	<b>ZCKJ534</b> <b>ZCKJ534H29</b>	0.320 0.320

## Plug-in bodies with single-pole contact

Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>With module comprising 2 LEDs, 24 V <math>\overline{\text{---}}</math></b>						
1 step	CO snap action		—	Pg 13.5 ISO M20 x 1.5	<b>ZCKJ1121</b> <b>ZCKJ1121H29</b>	0.340 0.340
<b>With module comprising 2 LEDs, 110/240 V <math>\sim</math></b>						
1 step	CO snap action		—	Pg 13.5 ISO M20 x 1.5	<b>ZCKJ1134</b> <b>ZCKJ1134H29</b>	0.340 0.340



ZCKJ1...●●●


(1) : NC contact with positive opening operation.

## Indicator light module characteristics

Type of indicator	1 LED or 2 LEDs	2 LEDs
Rated insulation voltage	50 V $\overline{\text{---}}$ , conforming to IEC 60947-1	250 V $\sim$ , conforming to IEC 60947-1
Current consumption	7 mA per LED	9 mA per LED
Rated operational voltage	24 V $\overline{\text{---}}$	110/240 V $\sim$
Voltage limits	20...30 V $\overline{\text{---}}$ (including ripple)	95...264 V $\sim$
Service life	100 000 hours	100 000 hours
Reverse polarity protection	Yes	—

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body. Adaptable sub-assemblies:  
 bodies with M12 connector




ZCKJxD

### Fixed bodies with 2-pole contact

Type	With contact block	Scheme	Positive operation (1)	Reference	Weight kg
1 step	1 NC + 1 NO snap action (XE2SP2151)		⊙	ZCKJ1D	0.320
	1 NC + 1 NO break before make, slow break (XE2NP2151)		⊙	ZCKJ5D	0.320
	1 NO + 1 NC make before break, slow break (XE2NP2161)		⊙	ZCKJ6D	0.320
	2 NC simultaneous, slow break (XE2NP2141)		⊙	ZCKJ7D	0.320
	2 NO simultaneous, slow break (XE2NP2131)		-	ZCKJ8D	0.320

### Female pre-wired connectors



XZCP1164L

Description	Cable length	Reference	Weight kg
Female pre-wired connectors, M12, straight Ø 5,0 mm cable Conductor c.s.a: 5 x 0.34 mm <sup>2</sup> Nominal current : 4 A Nominal voltage: ~ 30 V, ~ 36 V	1 m	XZCP1164L2	0.115
	5 m	XZCP1164L5	0.270
	10 m	XZCP1164L10	0.520


(1) NC contact with positive opening operation.




## Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies: contact blocks


1




XE2SP21●1



XE2NP21●1



XE3P21●1




XE3●P21●1

Contact blocks					
Type of contact	Scheme	For bodies	Positive operation (1)	Reference	Weight kg
<b>2-pole contact</b>					
1 NC + 1 NO snap action		ZCKJ1 ZCKJ1D	⊕	XE2SP2151	0.020
1 NC + 1 NO break before make, slow break		ZCKJ5 ZCKJ5D	⊕	XE2NP2151	0.020
2 CO simultaneous snap action		ZCKJ2	-	XE2SP2021	0.045
2 CO staggered, snap action		ZCKJ4	-	XE2SP2031	0.045
1 NO + 1 NC make before break, slow break		ZCKJ6 ZCKJ6D	⊕	XE2NP2161	0.020
2 NC simultaneous, slow break		ZCKJ7 ZCKJ7D	⊕	XE2NP2141	0.020
2 NO simultaneous, slow break		ZCKJ8 ZCKJ8D	-	XE2NP2131	0.020
2 NC snap action		ZCKJ9	⊕	XE2SP2141	0.020
<b>3-pole contact</b>					
1 NC + 2 NO snap action		ZCKJD31	⊕	XE3SP2151	0.035
2 NC + 1 NO snap action		ZCKJD39	⊕	XE3SP2141	0.035
2 NC + 1 NO break before make, slow break		ZCKJD37	⊕	XE3NP2141	0.035
1 NC + 2 NO break before make, slow break		ZCKJD35	⊕	XE3NP2151	0.035


(1) ⊕: NC contact with positive opening operation.

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Fixed or plug-in body  
Adaptable sub-assemblies: add-ons




ZCKZ0●●



ZCKJ01●●



ZCKJ90●



ZCKJ82A

## Covers + indicator light module

For use with	Number and type of indicators	Voltage	Reference	Weight kg
Fixed body	1 LED	24 V $\overline{\text{---}}$	ZCKZ020	0.060
	2 LEDs	24 V $\overline{\text{---}}$	ZCKZ021	0.060
	2 LEDs	110/240 V $\sim$	ZCKZ034	0.060
Plug-in body	2 LEDs	24 V $\overline{\text{---}}$	ZCKJ0121	0.200
	2 LEDs	110/240 V $\sim$	ZCKJ0134	0.200

## Indicator light modules

For use with	Number and type of indicators	Voltage	Reference	Weight kg
Fixed body	1 LED	24 V $\overline{\text{---}}$	ZCKJ902	0.030
	2 LEDs	24 V $\overline{\text{---}}$	ZCKJ906	0.030
	2 LEDs	110/240 V $\sim$	ZCKJ904	0.030

## Module with resistor for machine diagnostics

For use with	Resistor value	Reference	Weight kg
Fixed body (ZCKJ1 only)	15 k $\Omega$ , 1/4 W	ZCKJ82A	0.030

### Other versions


Covers + indicator light module for other supply voltages.  
Please consult our Customer Care Centre.

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies

**Function diagrams (positive operation assured only if the associated sub-assemblies are )**


**Heads ZCKE61, ZCKE619, ZCKE66 with body**

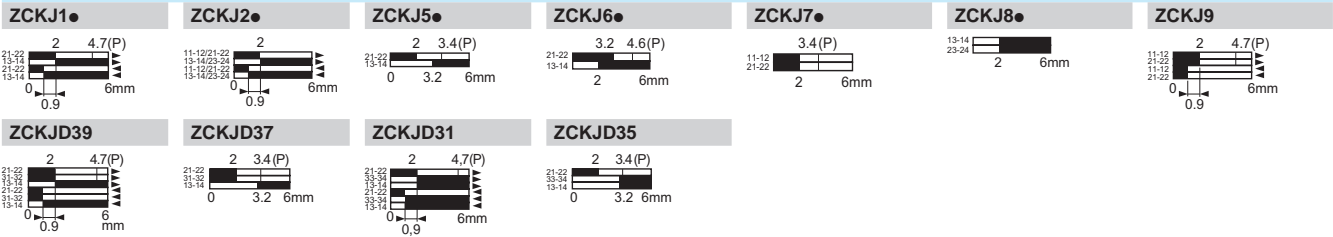


**Head ZCKE63 with body**

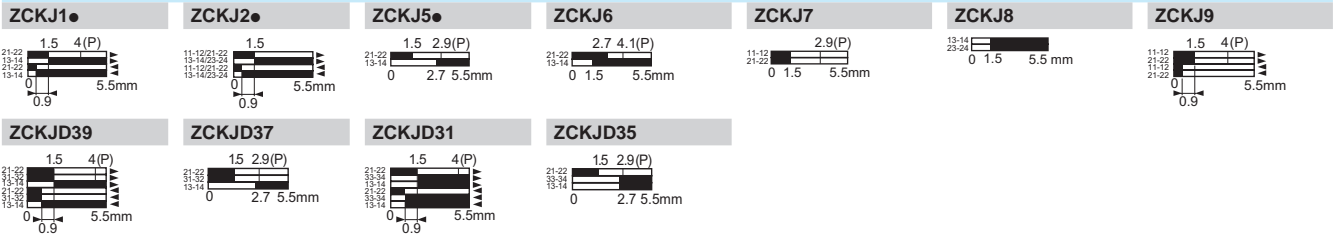


**Heads ZCKE64, ZCKE65 with body**

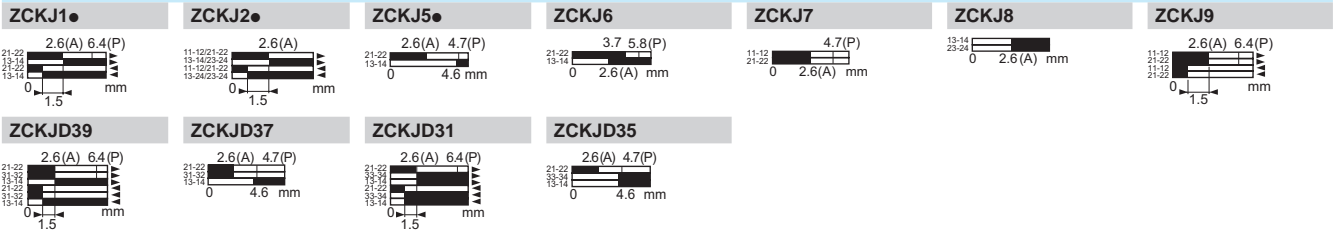


**Heads ZCKE67, ZCKE629 with body**

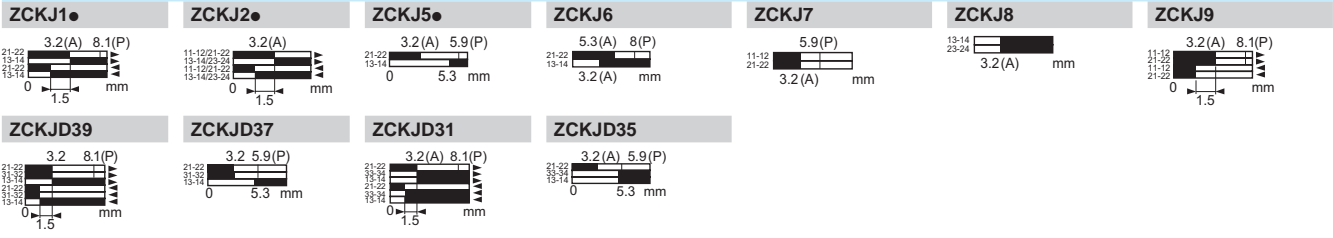


**Heads ZCKE21, ZCKE23 with body**

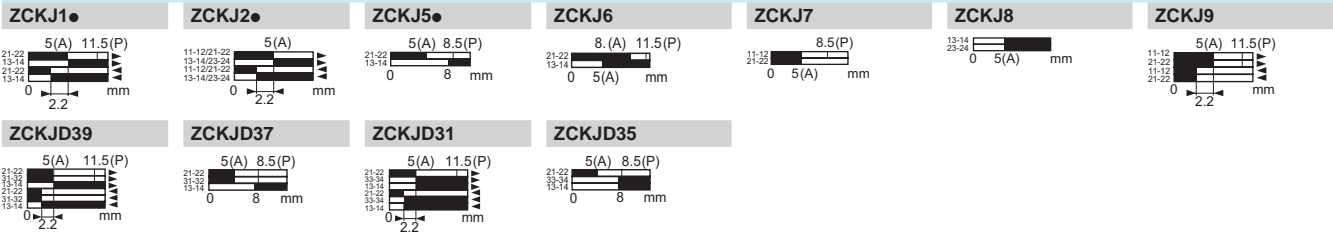

**Heads ZCKE06, ZCKE08 with body**

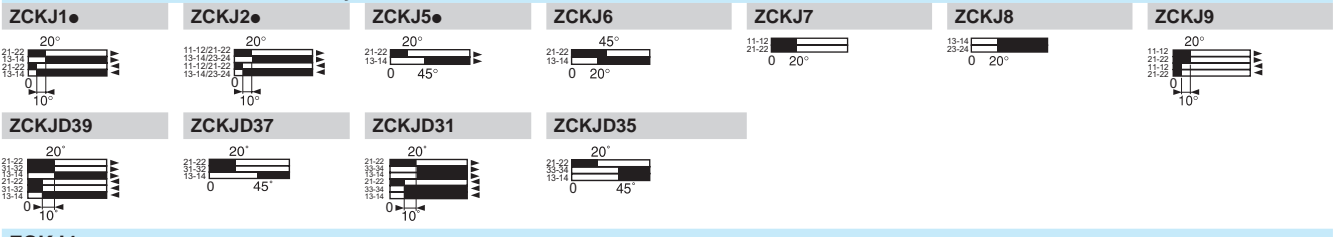

**ZCKJ4●**

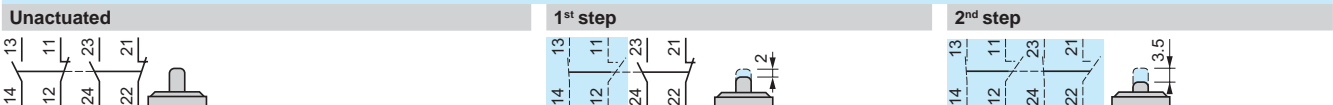

Contact operation

 closed  
 open


(A) = cam displacement  
 (P) = positive opening point

# Limit switches

OsiSense XC Standard, industrial format EN 50041  
Metal, conforming to CENELEC EN 50041, type XCKJ  
Fixed or plug-in body  
Adaptable sub-assemblies


## Function diagrams (positive operation assured only if the associated sub-assemblies are $\rightarrow$ )

### Head ZCKE05 with body

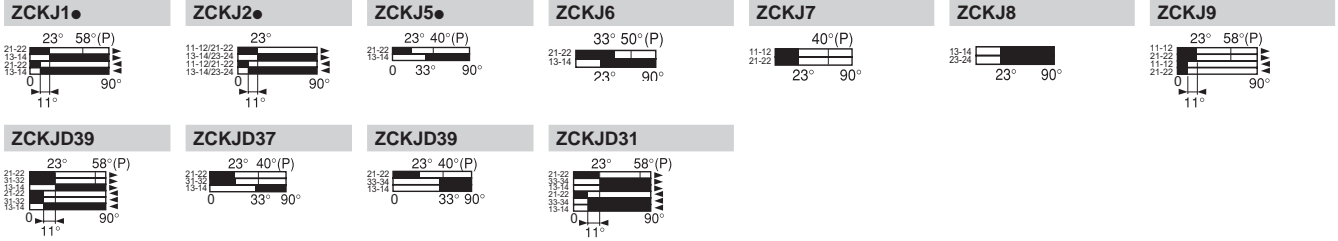


### ZCKJ4


#### Unactuated




#### 1<sup>st</sup> step, actuated from left or right



#### 2<sup>nd</sup> step, actuated from left or right




### Head ZCKE09 with body

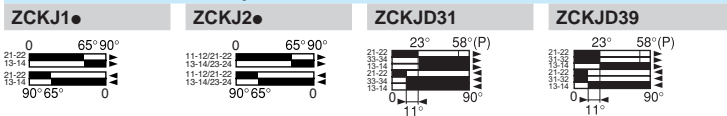


### ZCKJ404, J4104 (body with head)


#### Unactuated



#### Actuated from left



#### Actuated from right



Contact operation




(P) = positive opening point


## Wiring schemes

### Indicator light modules


#### 1 LED, 24 V $\sim$

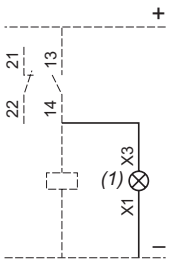


#### 2 LEDs, 24 V $\sim$

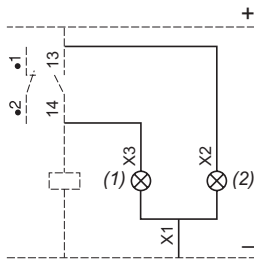

#### 2 LEDs, 110/240 V $\sim$

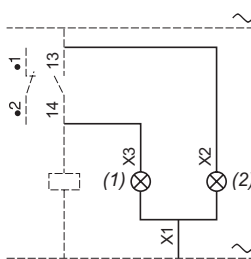


### Module with resistor

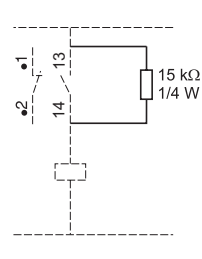

(1) Orange indicator  
(2) Green indicator


### ZCKJ $\bullet$ D



1 - 2 = NC  
3 - 4 = NO  
5 =  $\perp$   
4 A / 24 V max.



### Pre-wired connectors XZCP1164



1 = brown  
2 = white/black  
3 = blue  
4 = black  
5 = yellow/green

# Limit switches




OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies

## Bodies

ZCKJ1, J2, J5, J4, J2●, J3●, J6, J7, J8, J9  
 ZCKJ1H29, J2H29, J5H29, J4H29, J2●H29, J3●H29,  
 J6H29, J7H29, J8H29, J9H29  
 ZCKJ1H7, J2H7, J5H7, J4H7, J2●H7, J3●H7, J6H7,  
 J7H7, J8H7, J9H7

ZCKJ11, J21, J41, J11●●  
 ZCKJ11H29, J21H29, J41H29, J11●●H29  
 ZCKJ11H7, J21H7, J41H7, J11●●H7



ZCKJ1D, J5D, J6D, J7D, J8D

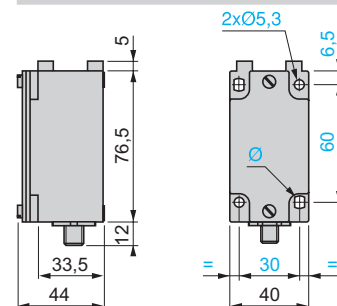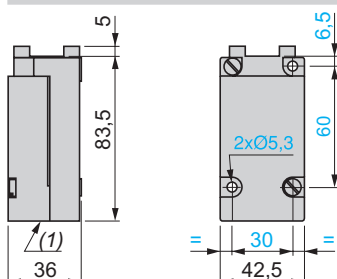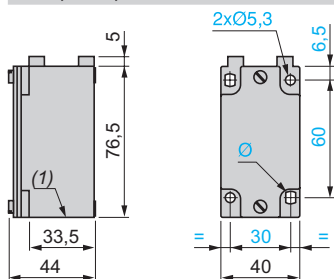

## Bodies with rotary head mounted

ZCKJ404, ZCKJ404H29, ZCKJ404H7

ZCKJ4104, ZCKJ4104H29, ZCKJ4104H7


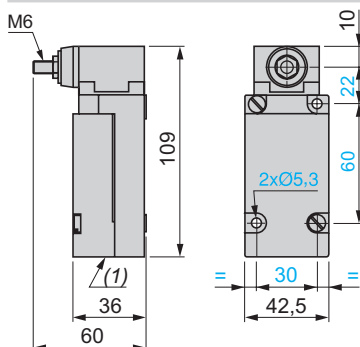
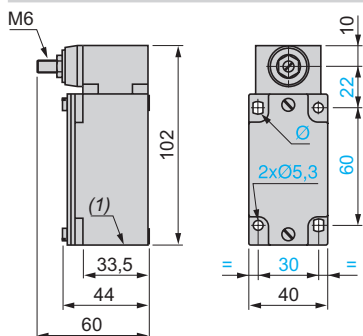


## Plunger heads

ZCKE61

ZCKE619




ZCKE63

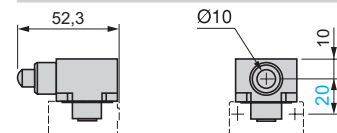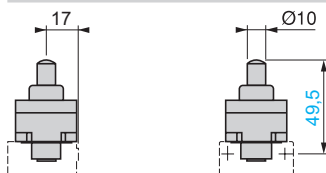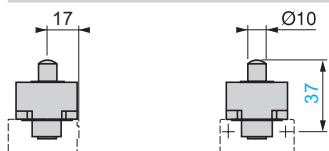

ZCKE64

ZCKE65




ZCKE66

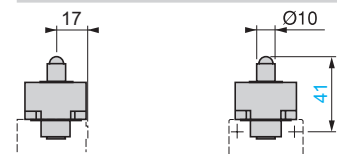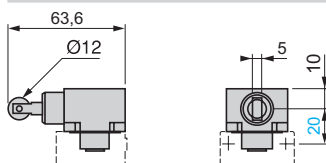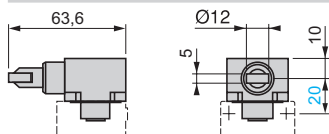

ZCKE62, ZCKE67

ZCKE629

ZCKE21, ZCKE23

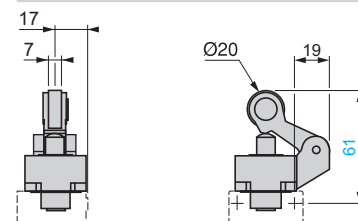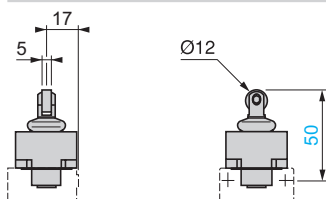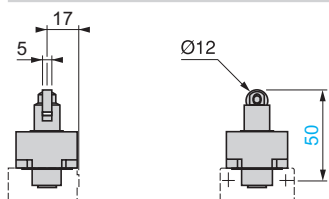


(1) 1 tapped entry for ISO M20 x 1.5 or Pg 13.5 cable gland or tapped 1/2" NPT.  
 Ø: 2 elongated holes Ø 5.3 x 7.3.

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies

## Rotary head ZCKE05 with operating lever


ZCKY11, Y13, Y14

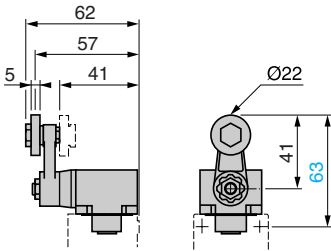

ZCKY41, Y43

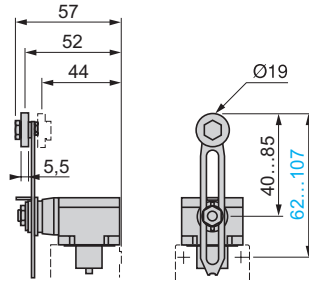


ZCKY51, Y52, Y53, Y59

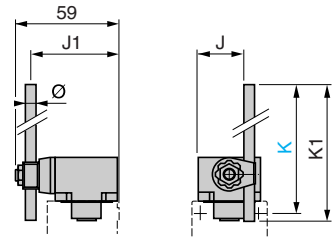


	J	J1	K max.	K1	Ø
ZCKY51	20	49	137	123	∅ 3
ZCKY52	20	49	137	125	∅ 3
ZCKY53	20	49	137	125	∅ 3
ZCKY59	26.2	48	212	200	∅ 6

ZCKY81

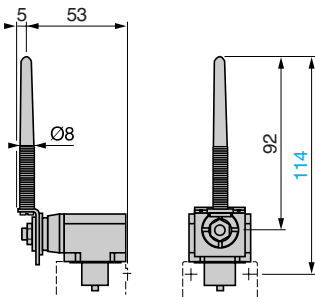


ZCKY91

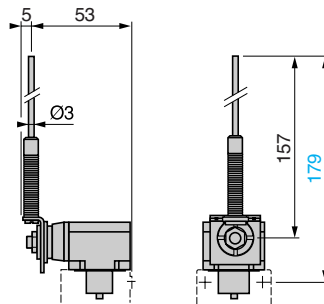


## Rotary head ZCKE09 with operating lever

ZCKY61

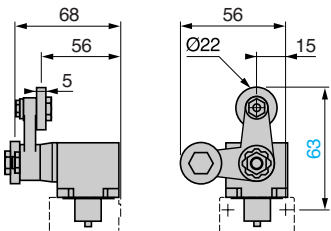


ZCKY71

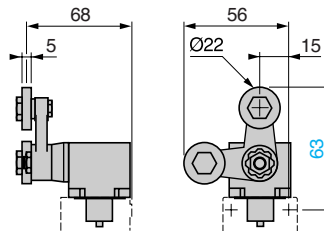


## Multi-directional heads

ZCKE06

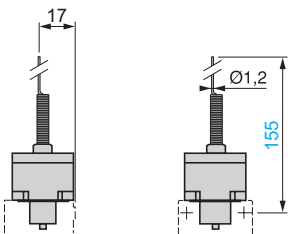


ZCKE08

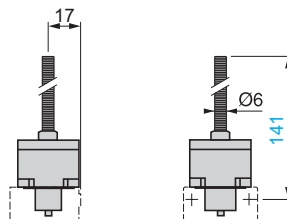

Note: operating lever spindle threaded M6.

## Pre-wired connectors XZCP1164●

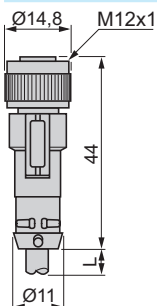


L = 2, 5 or 10 m.


# Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies for low temperature applications (- 40°C)

1




ZCKJ1



ZCKJ11

Bodies with contacts For plunger or rotary head						
Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>Fixed bodies</b>						
1 step	2-pole NC + NO snap action (XE2SP2151)		⊕	Pg 13.5	ZCKJ1	0.310
				ISO M20 x 1.5	ZCKJ1H29	0.310
				1/2" NPT	ZCKJ1H7	0.310
	Double-pole 2 CO simultaneous, snap action (XESP2021)		-	Pg 13.5	ZCKJ2	0.310
				ISO M20 x 1.5	ZCKJ2H29	0.310
				1/2" NPT	ZCKJ2H7	0.310
	2-pole NC + NO break before make, slow break (XE2NP2151)		⊕	Pg 13.5	ZCKJ5	0.310
ISO M20 x 1.5				ZCKJ5H29	0.310	
2-pole NO + NC make before break, slow break (XE2NP2161)		⊕	Pg 13.5	ZCKJ6	0.310	
			ISO M20 x 1.5	ZCKJ6H29	0.310	
2-pole NC + NC simultaneous, slow break (XE2NP2141)		⊕	Pg 13.5	ZCKJ7	0.310	
			ISO M20 x 1.5	ZCKJ7H29	0.310	
2-pole NO + NO simultaneous, slow break (XE2NP2131)		-	Pg 13.5	ZCKJ8	0.310	
			ISO M20 x 1.5	ZCKJ8H29	0.310	
2-pole NC + NC snap action (XE2SP2141)		⊕	Pg 13.5	ZCKJ9	0.310	
			ISO M20 x 1.5	ZCKJ9H29	0.310	
2 step	Double-pole 2 CO staggered, snap action (XESP2031)		-	Pg 13.5	ZCKJ4	0.310
				ISO M20 x 1.5	ZCKJ4H29	0.310
1 step	Single-pole CO snap action		-	Pg 13.5	ZCKJ11	0.300
				ISO M20 x 1.5	ZCKJ11H29	0.300
1/2" NPT				ZCKJ11H7	0.300	
Double-pole 2 CO simultaneous snap action		-	Pg 13.5	ZCKJ21	0.300	
			ISO M20 x 1.5	ZCKJ21H29	0.300	
			1/2" NPT	ZCKJ21H7	0.300	
2 step	Double-pole 2 CO staggered, snap action		-	Pg 13.5	ZCKJ41	0.300
				ISO M20 x 1.5	ZCKJ41H29	0.300
				1/2" NPT	ZCKJ41H7	0.300
<b>Bodies with contacts With spring return rotary head (without operating lever)</b>						
Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>Fixed body</b>						
2 step 1 from the left AND 1 from the right	Double-pole 2 CO staggered, snap action		-	Pg 13.5	ZCKJ4046	0.455
				ISO M20 x 1.5	ZCKJ4046H29	0.455
				1/2" NPT	ZCKJ4046H7	0.455
<b>Plug-in body</b>						
2 step 1 from the left AND 1 from the right	Double-pole 2 CO staggered, snap action		-	Pg 13.5	ZCKJ41046	0.465
				ISO M20 x 1.5	ZCKJ41046H29	0.465
				1/2" NPT	ZCKJ41046H7	0.465


(1) ⊕: head assuring positive opening operation.

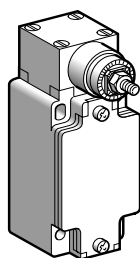


ZCKJ4046

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies for low temperature applications (- 40°C)




ZCKE616




ZCKE636




ZCKE626




ZCKE676




ZCKE646




ZCKE656




ZCKE216




ZCKE236




ZCKE056



ZCKE096



ZCKE066



ZCKE086

## Plunger heads

Type of operator	Compatible bodies	Maximum actuation speed	Positive operation (1)	Reference	Weight kg	
<b>For actuation on end</b>						
End plunger metal	ZCKJ●, ZCKJ●●	0.5 m/s	→	ZCKE616	0.140	
Side plunger metal	ZCKJ●, ZCKJ●●, except ZCKJ4 and J41	0.5 m/s	→	ZCKE636	0.200	
<b>For actuation by 30° cam</b>						
Roller plunger steel	ZCKJ●, ZCKJ●●	1 m/s	→	ZCKE626	0.155	
End reinforced roller plunger steel	ZCKJ●, ZCKJ●●	1 m/s	→	ZCKE676	0.155	
Side roller plunger steel	Horizontal	ZCKJ●, ZCKJ●●, except ZCKJ4 and J41	0.6 m/s	→	ZCKE646	0.205
	Vertical	ZCKJ●, ZCKJ●●, except ZCKJ4 and J41	0.6 m/s	→	ZCKE656	0.205
Roller lever plunger (1 direction of actuation)	Thermoplastic	ZCKJ●, ZCKJ●●	1.5 m/s	→	ZCKE216	0.185
	Steel	ZCKJ●, ZCKJ●●	1.5 m/s	→	ZCKE236	0.195

## Rotary heads (without operating lever)

Type	Compatible bodies	Maximum actuation speed	Positive operation (1)	Reference	Weight kg
Spring return, for actuation from left AND right or from left OR right (see page 1/136)	ZCKJ●, ZCKJ●●	1.5 m/s by 30° cam	→	ZCKE056	0.165
Stay put, for actuation from left AND right (see page 1/136)	ZCKJ1, J11 ZCKJ2, J21	0.5 m/s	–	ZCKE096	0.190

## Multi-directional heads

Type of operator	Compatible bodies	Maximum actuation speed	Positive operation (1)	Reference	Weight kg
<b>For actuation by any moving part</b>					
“Cat’s whisker”	ZCKJ●, ZCKJ●●, except ZCKJ4 and ZCKJ41	1 m/s in any direction	–	ZCKE066	0.115
Spring rod	ZCKJ●, ZCKJ●●, except ZCKJ4 and ZCKJ41	0.5 m/s in any direction	–	ZCKE086	0.125

(1) →: head assuring positive opening operation.



# Limit switches

OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies for low temperature applications (- 40°C)


1




ZCKY1




ZCKY4




ZCKY51




ZCKY5




ZCKY59



ZCKY81




ZCKY91




ZCKY71




ZCKY61



XE2SP21



XE2NP21



XES P20

## Operating levers for rotary heads

Description		Positive operation (1)	Reference	Weight kg
-------------	--	------------------------	-----------	-----------

### For actuation by 30° cam

Roller lever (2)	Thermoplastic	⊖	ZCKY11	0.025
	Steel	⊖	ZCKY13	0.035
	Steel, ball bearing mounted	⊖	ZCKY14	0.030
Variable length roller lever (3)	Thermoplastic	-	ZCKY41	0.030
	Steel	-	ZCKY43	0.040

### For actuation by any moving part

Square rod (2)	∅ 3 mm steel, L = 125 mm	-	ZCKY51	0.025
Round rod (2)	∅ 3 mm steel, L = 125 mm	-	ZCKY53	0.025
	∅ 3 mm glass fibre, L = 125 mm	-	ZCKY52	0.020
	∅ 6 mm thermoplastic, L = 200 mm	-	ZCKY59	0.030
Spring lever (3)		-	ZCKY81	0.020
Spring-metal rod lever (3)		-	ZCKY91	0.025

### For actuation by specific cam (only for operation with head ZCKE096)

Forked arm with rollers (2)	1 track thermoplastic	-	ZCKY71	0.035
	2 track	-	ZCKY61	0.035

## 2-pole and double-pole contact blocks

Type of contact	Scheme	For body	Positive operation (1)	Reference	Weight kg
NC + NO snap action		ZCKJ1	⊖	XE2SP2151	0.020
NC + NO break before make, slow break		ZCKJ5	⊖	XE2NP2151	0.020
2 CO simultaneous, snap action		ZCKJ2	-	XESP2021	0.045
2 CO staggered, snap action		ZCKJ4	-	XESP2031	0.045
NC + NO make before break, slow break		ZCKJ6	⊖	XE2NP2161	0.020
NC + NC simultaneous, slow break		ZCKJ7	⊖	XE2NP2141	0.020
NO + NO simultaneous, slow break		ZCKJ8	-	XE2NP2131	0.020
NC + NC snap action		ZCKJ9	⊖	XE2SP2141	0.020

(1) ⊖: NC contact with positive opening operation or sub-assembly assuring positive opening operation.  
 (2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.  
 (3) Adjustable throughout 360° in 5° steps.


# Limit switches

OsiSense XC Standard, industrial format EN 50041


Metal, conforming to CENELEC EN 50041, type XCKJ

Fixed or plug-in body

Adaptable sub-assemblies for high temperature applications (+ 120°C)

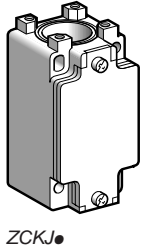

ZCKJ



ZCKJ15

Bodies with contacts		For plunger or rotary head				
Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>Fixed bodies</b>						
1 step	2-pole NC + NO snap action (XE2SP2151)		⊕	Pg 13.5	ZCKJ1	0.310
				ISO M20 x 1.5	ZCKJ1H29	0.310
				1/2" NPT	ZCKJ1H7	0.310
	Double-pole 2 CO simultaneous, snap action (XESP20215)		-	Pg 13.5	ZCKJ25	0.310
				ISO M20 x 1.5	ZCKJ25H29	0.310
				1/2" NPT	ZCKJ25H7	0.310
	2-pole NC + NO break before make, slow break (XE2NP2151)		⊖	Pg 13.5	ZCKJ5	0.310
				ISO M20 x 1.5	ZCKJ5H29	0.310
				1/2" NPT	ZCKJ5H7	0.310
	2-pole NO + NC make before break, slow break (XE2NP2161)		⊖	Pg 13.5	ZCKJ6	0.310
ISO M20 x 1.5				ZCKJ6H29	0.310	
1/2" NPT				ZCKJ6H7	0.310	
2-pole NC + NC simultaneous, slow break (XE2NP2141)		⊖	Pg 13.5	ZCKJ7	0.310	
			ISO M20 x 1.5	ZCKJ7H29	0.310	
			1/2" NPT	ZCKJ7H7	0.310	
2-pole NO + NO simultaneous, slow break (XE2NP2131)		-	Pg 13.5	ZCKJ8	0.310	
			ISO M20 x 1.5	ZCKJ8H29	0.310	
			1/2" NPT	ZCKJ8H7	0.310	
2-pole NC + NC snap action (XE2SP2141)		⊖	Pg 13.5	ZCKJ9	0.310	
			ISO M20 x 1.5	ZCKJ9H29	0.310	
			1/2" NPT	ZCKJ9H7	0.310	
2 step	Double-pole 2 CO staggered, snap action (XESP20315)		-	Pg 13.5	ZCKJ45	0.310
				ISO M20 x 1.5	ZCKJ45H29	0.310
				1/2" NPT	ZCKJ45H7	0.310
<b>Plug-in bodies</b>						
1 step	Single-pole CO snap action		-	Pg 13.5	ZCKJ115	0.300
				ISO M20 x 1.5	ZCKJ115H29	0.300
				1/2" NPT	ZCKJ115H7	0.300
Double-pole 2 CO simultaneous, snap action		-	Pg 13.5	ZCKJ215	0.300	
			ISO M20 x 1.5	ZCKJ215H29	0.300	
			1/2" NPT	ZCKJ215H7	0.300	
2 step	Double-pole 2 CO staggered, snap action		-	Pg 13.5	ZCKJ415	0.300
				ISO M20 x 1.5	ZCKJ415H29	0.300
				1/2" NPT	ZCKJ415H7	0.300
<b>Bodies with contacts</b>		<b>With spring return rotary head (without operating lever)</b>				
Type	With contact block	Scheme	Positive operation (1)	Cable entry	Reference	Weight kg
<b>Fixed body</b>						
2 step 1 from the left AND 1 from the right	Double-pole 2 CO staggered, snap action		-	Pg 13.5	ZCKJ4045	0.455
				ISO M20 x 1.5	ZCKJ4045H29	0.455
				1/2" NPT	ZCKJ4045H7	0.455
<b>Plug-in body</b>						
2 step 1 from the left AND 1 from the right	Double-pole 2 CO staggered, snap action		-	Pg 13.5	ZCKJ41045	0.465
				ISO M20 x 1.5	ZCKJ41045H29	0.465
				1/2" NPT	ZCKJ41045H7	0.465

(1) ⊕: head assuring positive opening operation.

## Limit switches

OsiSense XC Standard, industrial format EN 50041

Metal, conforming to CENELEC EN 50041, type XCKJ

Fixed or plug-in body

Adaptable sub-assemblies for high temperature applications (+ 120°C)

## Plunger heads

Type of operator		Compatible bodies	Maximum actuation speed	Positive operation (1)	Reference	Weight kg
<b>For actuation on end</b>						
End plunger	Metal	ZCKJ1, J2, J4, ZCKJ115, J215, J415, ZCKJ5, J6, J7, J8, J9	0.5 m/s	⊕	ZCKE615	0.140
Side plunger	Metal	ZCKJ1, J2, ZCKJ115, J215, ZCKJ5, J6, J7, J8, J9	0.5 m/s	⊕	ZCKE635	0.200
<b>For actuation by 30° cam</b>						
End ball bearing plunger	Steel	ZCKJ1, J2, J4, ZCKJ115, J215, J415, ZCKJ5, J6, J7, J8, J9	0.1 m/s	⊕	ZCKE665	0.150
End roller plunger	Steel	ZCKJ1, J2, J4, ZCKJ115, J215, J415, ZCKJ5, J6, J7, J8, J9	1 m/s	⊕	ZCKE625	0.155
End reinforced roller plunger	Steel	ZCKJ1, J2, J4, ZCKJ115, J215, J415, ZCKJ5, J6, J7, J8, J9	1 m/s	⊕	ZCKE675	0.155
Side roller plunger	Steel Horizontal	ZCKJ1, J2, ZCKJ115, J215, ZCKJ5, J6, J7, J8, J9	0.6 m/s	⊕	ZCKE645	0.205
	Steel Vertical	ZCKJ1, J2, ZCKJ115, J215, ZCKJ5, J6, J7, J8, J9	0.6 m/s	⊕	ZCKE655	0.205
Roller lever plunger (1 direction of actuation)	Steel	ZCKJ1, J2, J4, ZCKJ115, J215, J415, ZCKJ5, J6, J7, J8, J9	1.5 m/s	⊕	ZCKE235	0.195
	Thermoplastic	ZCKJ1, J2, J4, ZCKJ115, J215, J415, ZCKJ5, J6, J7, J8, J9	1.5 m/s	⊕	ZCKE215	0.185


## Rotary heads (without operating lever)

Type		Compatible bodies	Maximum actuation speed	Positive operation (1)	Reference	Weight kg
Spring return, for actuation from left AND right or from left OR right (see page 1/136)		ZCKJ1, J2, J4, ZCKJ115, J215, ZCKJ415, ZCKJ5, J6, J7, J8, J9	1.5 m/s by 30° cam	⊕	ZCKE055	0.165
Stay put, actuation from left AND right (see page 1/136)		ZCKJ1, J2, ZCKJ115, J215	0.5 m/s	–	ZCKE095	0.190

## Multi-directional heads


Type of operator		Compatible bodies	Maximum actuation speed	Positive operation (1)	Reference	Weight kg
<b>For actuation by any moving part</b>						
"Cat's whisker"		ZCKJ1, J2, ZCKJ115, J215, ZCKJ5, J6, J7, J8, J9	1 m/s in any direction	–	ZCKE065	0.115
Spring rod		ZCKJ1, J2, ZCKJ115, J215, ZCKJ5, J6, J7, J8, J9	0.5 m/s in any direction	–	ZCKE085	0.125

(1) ⊕: head assuring positive opening operation.




ZCKE615

ZCKE635




ZCKE665

ZCKE625




ZCKE675

ZCKE645




ZCKE655

ZCKE235



ZCKE055

ZCKE095



ZCKE065

ZCKE085

# Limit switches


OsiSense XC Standard, industrial format EN 50041  
 Metal, conforming to CENELEC EN 50041, type XCKJ  
 Fixed or plug-in body  
 Adaptable sub-assemblies for high temperature applications (+ 120°C)




ZCKY1




ZCKY43



ZCKY51



ZCKY5




ZCKY715




ZCKY615



XE2SP21



XE2NP21



XESP20

## Operating levers for rotary heads

Description		Positive operation (1)	Reference	Weight kg
-------------	--	------------------------	-----------	-----------

For actuation by 30° cam				
Roller lever (2)	Thermoplastic	⊕	ZCKY115	0.025
	Steel	⊕	ZCKY13	0.035
	Steel, ball bearing mounted	⊕	ZCKY14	0.030
Variable length roller lever (3)	Thermoplastic	-	ZCKY415	0.030
	Steel	-	ZCKY43	0.040

For actuation by any moving part				
Square rod (2)	∅ 3 mm steel, L = 125 mm	-	ZCKY51	0.025
Round rod (2)	∅ 3 mm steel, L = 125 mm	-	ZCKY53	0.025
	∅ 3 mm glass fibre, L = 125 mm	-	ZCKY52	0.020

For actuation by specific cam (only for operation with head ZCKE095)				
Forked arm with rollers (2)	1 track	-	ZCKY715	0.035
	2 track	-	ZCKY615	0.035

## 2-pole and double-pole contact blocks

Type of contact	Scheme	For bodies	Positive operation (1)	Reference	Weight kg
NC + NO snap action		ZCKJ1	⊕	XE2SP2151	0.020
NC + NO break before make, slow break		ZCKJ5	⊕	XE2NP2151	0.020
2 CO simultaneous, snap action		ZCKJ25	-	XESP20215	0.045
2 CO staggered, snap action		ZCKJ45	-	XESP20315	0.045
NC + NO make before break, slow break		ZCKJ6	⊕	XE2NP2161	0.020
NC + NC simultaneous, slow break		ZCKJ7	⊕	XE2NP2141	0.020
NO + NO simultaneous, slow break		ZCKJ8	-	XE2NP2131	0.020
NC + NC snap action		ZCKJ9	⊕	XE2SP2141	0.020

(1) ⊕: NC contact with positive opening operation or sub-assembly assuring positive opening operation.  
 (2) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever or its mounting.  
 (3) Adjustable throughout 360° in 5° steps.