

# › NANO-PLC

## em4 Ethernet & em4 Local

- › Up to 46 I/Os - Base 16 DI (4 HighSpeed/ 12 AI ), 8 DO + 2 Solid State Relays
- › Analog Inputs 4-20 mA, 0-10 V<sub>DC</sub> and 0-Vdc 12 bits
- › Ethernet Modbus TCP/IP (Client/Server) and Modbus RTU RS485 via interface (Master/Slave)
- › Event management & datalog via mail or FTP server
- › PLC performance with the shape and ease of use of a logic controller

EM4B26-ET  
Base 26 I/O EthernetEM4B26  
Base 26 I/O Local

| Product selection |                   |
|-------------------|-------------------|
| Type              | Part number       |
| EM4B26-ET         | <b>88 981 133</b> |
| EM4B26            | <b>88 981 103</b> |

| Kit Description   | Part number       |
|---|-------------------|
| USB interface   | <b>88 980 110</b> |
| USB cable 3m B type   | <b>88 980 170</b> |
| Accessories Description   | Part number       |
| Starter Kit em4 Ethernet, Nano-PLC with embedded Ethernet, Ethernet cable, USB key with programming soft                                | <b>88 981 136</b> |
| Starter Kit em4 local, Nano-PLC standalone, USB interface & cable, USB key with programming soft  | <b>88 981 106</b> |
| KIT em4 Ethernet , Nano-PLC with embedded Ethernet, Crouzet Touch CTP107-E Performance, Ethernet cable, USB key with Crouzet Touch Soft | <b>88 970 567</b> |
| KIT em4 Ethernet , Nano-PLC with embedded Ethernet, Crouzet Touch CTP110-E Performance, Ethernet cable, USB key with Crouzet Touch Soft | <b>88 970 577</b> |

|  | EM4B26-ET  | EM4B26   |
|--|--|--|
| <b>General features</b>                                |  |  |
| Ethernet Modbus TCP/IP (Client//Server)                | Yes (16 IP range /// 24 words + 16 bits)   | -  |
| Modbus RTU (Master//Slave)                             | Yes via interface (16 IP range /// 24 words + 16 bits)   |  |
| Datalog via mail or FTP                                | Yes (24 data channel; 68 000 recordings)   | -  |
| Event management via mail                              | Yes (24 events)  | -  |
| Bluetooth  | Yes via interface  |  |
| <b>Specific characteristics</b>                        |  |  |
| Part number  | <b>88 981 133</b>  | <b>88 981 103</b>  |
| Finish   | Glossy black   |  |
| On front panel color                                   | Black RAL 9011   |  |
| On terminal block color                                | Blue RAL 5017  |  |
| Protection rating<br>(in accordance with IEC/EN 60529) | IP 40 on front panel<br>IP 20 on terminal block  |  |
| Weight   | Without packing: 345 g<br>With packing: 395 g  | Without packing: 310 g<br>With packing: 355 g  |
| Dimensions   | Without packing: 124.6 x 90 x 60.6 mm / 4.91 x 3.54 x 2.38 inch<br>With packing: 148 x 103 x 65 mm / 5.83 x 4.06 x 2.56 inch | Without packing: 124.6 x 90 x 60.4 mm / 4.91 x 3.54 x 2.38 inch<br>With packing: 148 x 103 x 65 mm / 5.83 x 4.06 x 2.56 inch |

|   | <b>EM4B26-ET</b>  | <b>EM4B26</b>                      |
|---|---|------------------------------------|
| Programming / exploitation  | Via USB, Bluetooth, Ethernet / Via Bluetooth, Ethernet  | Via USB, Bluetooth / Via Bluetooth |
| Ethernet connection   | Type RJ45, 10/100 Mbit/s, MDI/MDIX  | -                                  |
| Adressage   | Static or dynamic (DHCP server / Auto IP)   | -                                  |
| Protocols   | Modbus TCP (client / server), Discovery, UDP, TCP, FTP, SMTP (SSL/TLS), Workshop communication via Ethernet (SSL/TLS)   | -                                  |
| Cable length  | Maximun length between 2 devices: 100 m / 3937 inch   | -                                  |
| Ethernet earthing   | Yes, refer to the quick reference guide supplied with the product   | -                                  |
| <b>General characteristics</b>  |   |                                    |
| Products certification  | CE, cULus Listed  |                                    |
| Conformity with the low voltage directive (in accordance with 2014/35/EU) | IEC/EN 61131-2 (Open equipment)   |                                    |
| Conformity with the EMC directive (in accordance with 2014/30/EU)         | IEC/EN 61000-6-1 (Residential, commercial and light-industrial environments)<br>IEC/EN 61000-6-2 (Industrial)<br>IEC/EN 61000-6-3 (Residential, commercial and light-industrial environments)<br>IEC/EN 61000-6-4 (Industrial)  |                                    |
| Power supply earthing   | None  |                                    |
| Ovvoltage category  | 3 in accordance with IEC/EN 60664-1   |                                    |
| Pollution   | Degree: 2 in accordance with IEC/EN 61131-2   |                                    |
| Maximum utilization altitude  | Operation: 2000 m<br>Transport: 3000 m  |                                    |
| Mechanical resistance   | Immunity to vibrations IEC/EN 60068-2-6, Fc test<br>Immunity to shock IEC/EN 60068-2-27, Ea test  |                                    |
| Resistance to electrostatic discharge                                     | Immunity to ESD IEC/EN 61000-4-2, level 3   |                                    |
| Resistance to HF interference (Immunity)                                  | Immunity to radiated electrostatic fields IEC/EN 61000-4-3, level 3<br>Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3<br>Immunity to shock waves IEC/EN 61000-4-5<br>Radio frequency in common mode IEC/EN 61000-4-6, level 3   |                                    |
| Conducted and radiated emissions (in accordance with EN 55022/11 group 1) | Class B   |                                    |
| Operation temperature   | -20 (-4 °F) → +60 °C (140 °F) (+40 °C (104 °F) in a non-ventilated enclosure)   |                                    |
| Storage temperature   | -40 (-40 °F) → +80 °C (176 °F)  |                                    |
| Relative humidity   | 95% max. (no condensation or dripping water)  |                                    |
| Screw terminals connection capacity                                       | Flexible wire with ferrule: 1 conductor: 0.2 to 2.5 mm <sup>2</sup> (AWG 24-14)<br>Flexible wire with ferrule: 2 conductors: 0.2 to 0.75 mm <sup>2</sup> (AWG 24-18)<br>Rigid wire: 1 conductor: 0.2 to 2.5 mm <sup>2</sup> (AWG 24-14)<br>Rigid wire: 2 conductors: 0.2 to 0.75 mm <sup>2</sup> (AWG 24-18)<br>Tightening torque: 0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm)<br>Stripping length: 6 mm |                                    |
| Material  | Lexan, UL94V0   |                                    |
| Environnement   | Reach, RoHS, Halogen free 1272/2008/CE  |                                    |
| <b>Processing characteristics</b>   |   |                                    |
| LCD display   | Display with 4 lines of 18 characters, white characters on a black background, reverse display function   |                                    |
| Programming method  | FBD (Function Block Diagram), including SFC (Sequential Function Chart) (Grafcet)   |                                    |
| Program size  | Function blocks: typically 1000 blocks<br>Macro blocks: 127 max. (255 blocks per macro)   |                                    |
| Program memory  | Flash   |                                    |
| Removable memory  | N.A   |                                    |
| Data memory   | 2 k octets  |                                    |
| Back-up time (in the event of power failure)                              | Program and settings in the controller: 10 years<br>Data memory: 10 years   |                                    |

|   | EM4B26-ET   | EM4B26  |
|---|---|---|
| Data back-up  |   | Data backup in the flash memory is guaranteed if the product is powered on more than 10 seconds |
| Cycle time  | From 2 ms* to 90 ms, default value: 10 ms<br>*: Depending on configuration  | From 2 ms to 90 ms, default value: 10 ms  |
| Clock data retention  | 10 years (lithium battery) at 25 °C (77 °F)   |   |
| Clock drift   | Drift < 12 min/year (at 25 °C (77 °F))<br>6 s / month (at 25 °C (77 °F) with user-definable correction of drift).<br>Synchronizable by network  |   |
| Timer block accuracy  | 0.5 % ± 2 cycle time  |   |
| Start up time on power up   | < 10 s base alone, < 5 s base + 2 expansions + 1 accessory (RS485)  | < 3 s base alone, < 1.5 s base + 2 expansions + 1 accessory (USB, RS485...)                     |
| Self test   | Test firmware integrity (checksum memory)<br>Stability of the internal power supply<br>Check the conformity of the em4 device configuration with the configuration in the application program.  |   |
| <b>Supply</b>   |   |   |
| Nominal voltage   | 24 V <sub>DC</sub> (-15% / +20%)  |   |
| Operating limits  | 20.4 - 28.8 V <sub>DC</sub>   |   |
| Immunity from micro power cuts  | ≤ 1 ms (repetition 20 times)  |   |
| Max. absorbed power   | 5W @ 24 V <sub>DC</sub> , 6.5 W @ 28.8 V <sub>DC</sub> , - 0.3 W<br>backlight OFF<br>1.5W @ 24 V <sub>DC</sub> (I/O + backlight) = 0  | 4W @ 24 V <sub>DC</sub> , 5.3 W @ 28.8 V, - 0.3 W<br>backlight OFF                              |
| Protection against polarity inversions  | Yes   |   |
| Power monitoring  | Yes and value available through the application "FB Status", 1/10V, 5%.   |   |
| <b>Inputs</b>   |   |   |
| <b>Digital and high speed digital inputs 24 V<sub>DC</sub> - 4 inputs from I1 to I4</b> |   |   |
| Input used as digital input   |   | -   |
| Input voltage   | 24 V <sub>DC</sub> (-15% / +20%)  |   |
| Input current   | 1.8 mA @ 20.4 V<br>2.1 mA @ 24 V<br>2.5 mA @ 28.8 V   |   |
| Input impedance   | 11.6 kΩ   |   |
| Logic 1 voltage threshold   | ≥ 15 V <sub>DC</sub>  |   |
| Making current at logic state 1   | ≥ 1.3 mA  |   |
| Logic 0 voltage threshold   | ≤ 10 V <sub>DC</sub>  |   |
| Release current at logic state 0  | ≤ 0.8 mA  |   |
| Response time   | 1 to 2 cycle times  |   |
| Sensor type   | Contact or 3-wire PNP   |   |
| Conforming to IEC/EN 61131-2  | Type 1  |   |
| Input type  | Resistive   |   |
| Isolation between power supply and inputs   | None  |   |
| Isolation between inputs  | None  |   |
| Protection against polarity inversions  | Yes   |   |
| Status indicator  | On LCD screen   |   |
| Cable length  | ≤ 100 m   |   |
| <b>Input used as high speed digital input</b>   |   |   |
| Maximum counting frequency  | 3 channels encoder (I1, I2, I3): 20 kHz*<br>2 independent counters (I1, I2) (I3, I4) (Cumul, IND, DIR): 2 channels: 40 kHz*, 4 channels: 20 kHz*,<br>2 independent counters (I1, I2) (I3, I4) (PH, PH2): 2/4 channels: 20 kHz*<br>4 independent counters (I1, I2, I3, I4) (Up/Down): 1 channel: 60 kHz*, 2 channels: 40 kHz*, > 2 channels: 20 kHz* | * with a time cycle ≤ 10 ms and a ton / toff = 50% ± 5%, level 0 < 2V and level 1 > 20.4V       |
| Other functions   | 4 chronometers (I1, I2, I3, I4 )<br>4 tachometers (I1, I2, I3, I4 )   |   |

## EM4B26-ET

## EM4B26

Cable length  $\leq 3 \text{ m}$  with shielded twisted cable

**Digital 24 V<sub>DC</sub> and analog inputs 12 bits / 28.8 V - potentiometer - 8 inputs from I5 to IC****Input used as digital input**

|   |   |
|---|---|
| Input voltage                             | 24 V <sub>DC</sub> (-15% / +20%)                    |
| Input current                             | 1.8 mA @ 20.4 V<br>2.1 mA @ 24 V<br>2.5 mA @ 28.8 V |
| Input impedance                           | 11.6 kΩ   |
| Logic 1 voltage threshold                 | $\geq 11 \text{ V}_{DC}$                            |
| Making current at logic state 1           | $\geq 1 \text{ mA}$                                 |
| Logic 0 voltage threshold                 | $\leq 9 \text{ V}_{DC}$                             |
| Release current at logic state 0          | $\leq 0.7 \text{ mA}$                               |
| Response time                             | 1 to 2 cycle times                                  |
| Sensor type                               | Contact or 3-wire PNP                               |
| Conforming to IEC/EN 61131-2              | Type 1  |
| Input type                                | Resistive   |
| Isolation between power supply and inputs | None  |
| Isolation between inputs                  | None  |
| Protection against polarity inversions    | Yes   |
| Status indicator                          | On LCD screen                                       |
| Cable length                              | $\leq 100 \text{ m}$                                |

**Input used as analog input**

|   |   |   |
|---|---|---|
| Measuring range                                     | 0 → 10 V, 0 → V power supply or Voltmeter   | 0 → 10 V or 0 → V power supply                    |
| Input impedance                                     | 11.6 kΩ   |   |
| Maximum value without destruction                   | 28.8 V <sub>DC</sub> max  |   |
| Input type  | Common mode   |   |
| Resolution  | 12 bit at maximum input voltage (10 bit at 10V)   | 12 bit at maximum input voltage (10.5 bit at 10V) |
| Value of LSB  | 7.03 mV   |   |
| Conversion time                                     | Controller cycle time   |   |
| Maximum error in 0-10V mode                         | $\pm 1.1\%$ of full scale at 25 °C (77 °F)<br>$\pm 1.6\%$ of full scale at 55 °C (131 °F) |   |
| Maximum error in 0-V power supply mode              | $\pm 2\%$ of full scale at 25 °C (77 °F)<br>$\pm 3\%$ of full scale at 55 °C (131 °F)     |   |
| Repeat accuracy at 55 °C (131 °F)                   | $\pm 0.5\%$   |   |
| Voltmeter   | from 0 to 30.5 V, 5%  |   |
| Isolation between analogue channel and power supply | None  |   |
| Protection against polarity inversions              | Yes   |   |
| Potentiometer control                               | 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.  |   |
| Cable length  | $\leq 10 \text{ m}$ with shielded twisted cable (sensor not isolated)                     |   |

**Digital 24 V<sub>DC</sub> and analog inputs 12 bits / 10 V & 11 bits / 0-20 mA - 4 inputs from ID to IG****Input used as digital input (power off state)**

|                                 |   |
|---------------------------------|---|
| Input voltage                   | 24 V <sub>DC</sub> (-15% / +20%)                    |
| Input current                   | 1.5 mA @ 20.4 V<br>1.7 mA @ 24 V<br>2.1 mA @ 28.8 V |
| Input impedance                 | 13.9 kΩ   |
| Logic 1 voltage threshold       | $\geq 11 \text{ V}_{DC}$                            |
| Making current at logic state 1 | $\geq 0.8 \text{ mA}$                               |
| Logic 0 voltage threshold       | $\leq 8 \text{ V}_{DC}$                             |

|   | <b>EM4B26-ET</b>   | <b>EM4B26</b> |
|---|--|---------------|
| Release current at logic state 0  | ≤ 0.5 mA   |               |
| Response time   | 1 to 2 cycle times   |               |
| Sensor type   | Contact or 3-wire PNP  |               |
| Conforming to IEC/EN 61131-2  | Type 1   |               |
| Input type  | Resistive  |               |
| Isolation between power supply and inputs                                     | None   |               |
| Isolation between inputs  | None   |               |
| Protection against polarity inversions  | No   |               |
| Status indicator  | On LCD screen  |               |
| Cable length  | ≤ 100 m  |               |
| <b>Input used as 0-10 V analog input</b>                                      |  |               |
| Measuring range   | 0 → 10 V   |               |
| Input impedance   | 13.9 kΩ  |               |
| Maximum value without destruction   | 28.8 V <sub>DC</sub> max   |               |
| Input type  | Common mode  |               |
| Resolution  | 12 bit / 10V   |               |
| Value of LSB  | 2.45 mV  |               |
| Conversion time   | Controller cycle time  |               |
| Maximum error at 25 °C (77 °F)  | ± 0.8 % of full scale  |               |
| Maximum error at 55 °C (131 °F)   | ± 1.2 % of full scale  |               |
| Repeat accuracy at 55 °C (131 °F)   | ± 0.5 %  |               |
| Isolation between analogue channel and power supply                           | None   |               |
| Protection against polarity inversions  | Yes for voltage ≤ 10 V   |               |
| Potentiometer control   | 2.2 kΩ / 0.5 W (recommended), 10 kΩ max.   |               |
| Cable length  | ≤ 10 m with shielded twisted cable (sensor not isolated)   |               |
| <b>Input used as 0-20 mA analog input</b>                                     |  |               |
| Measuring range   | 0 → 20 mA (4 → 20 mA by the application)   |               |
| Input impedance   | 245 Ω  |               |
| Maximum value without destruction   | 30 mA max  |               |
| Input type  | Common mode  |               |
| Resolution  | 11 bit (normalized at 0 - 2000) / 20 mA  |               |
| Value of LSB  | 10 μA  |               |
| Conversion time   | Controller cycle time  |               |
| Maximum error at 25 °C (77 °F)  | ± 1.2 % of full scale  |               |
| Maximum error at 55 °C (131 °F)   | ± 1.7 % of full scale  |               |
| Repeat accuracy at 55 °C (131 °F)   | ± 0.5 %  |               |
| Isolation between analogue channel and power supply                           | None   |               |
| Protection against polarity inversions  | Yes  |               |
| Overvoltage protection  | Yes<br>If the input voltage is > 7 V, this one is automatically switched on 0-10V configuration. |               |
| Cable length  | ≤ 30 m with shielded twisted cable (sensor not isolated)   |               |
| <b>Outputs</b>  |  |               |
| <b>Digital / PWM solid state output - 2 solid state outputs from O1 to O2</b> |  |               |
| <b>Output used as digital output</b>  |  |               |
| Breaking voltage  | 10 → 28.8 V <sub>DC</sub>  |               |
| Nominal voltage   | 12 / 24 V <sub>DC</sub>  |               |
| Nominal current   | 0.5 A on resistive load @ 25 °C (77 °F)  |               |
| Max. breaking current   | 0.625 A  |               |
| Non repetitive overload current   | 1 A  |               |

|  | EM4B26-ET   | EM4B26 |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
|--|---|--------|-----------|--------|-------|------------------|--------|--------|----------|-------------|--------|--------|-----------|--------------|--------|--------|--------|-------------------------------|--------|--------|-----------|--|
| Maximum breaking current in the common                   | 1 A   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Voltage drop   | < 1 V for I = 0.5 A   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Response time  | Make = 1 cycle time + 30 µs typical<br>Release = 1 cycle time + 40 µs typical   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Built-in protections                                     | Against overloads and short-circuits: Yes<br>Against over voltages (*): Yes<br>Against inversions of power supply: Yes<br>(*) In the absence of a volt-free contact between the output of the logic controller and the load   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Min. load  | 1 mA  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Galvanic isolation                                       | No  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Cable length   | ≤ 10 m  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Truth table of the default                               | <table> <thead> <tr> <th></th> <th>Command</th> <th>Output</th> <th>Fault</th> </tr> </thead> <tbody> <tr> <td>Normal condition</td> <td>0<br/>1</td> <td>0<br/>1</td> <td>No<br/>No</td> </tr> <tr> <td>Overheating</td> <td>0<br/>1</td> <td>0<br/>0</td> <td>No<br/>Yes</td> </tr> <tr> <td>Underpowered</td> <td>0<br/>1</td> <td>0<br/>0</td> <td>X<br/>X</td> </tr> <tr> <td>Short circuit (current limit)</td> <td>0<br/>1</td> <td>0<br/>0</td> <td>No<br/>Yes</td> </tr> </tbody> </table> |        | Command   | Output | Fault | Normal condition | 0<br>1 | 0<br>1 | No<br>No | Overheating | 0<br>1 | 0<br>0 | No<br>Yes | Underpowered | 0<br>1 | 0<br>0 | X<br>X | Short circuit (current limit) | 0<br>1 | 0<br>0 | No<br>Yes |  |
|  | Command   | Output | Fault     |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Normal condition   | 0<br>1  | 0<br>1 | No<br>No  |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Overheating  | 0<br>1  | 0<br>0 | No<br>Yes |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Underpowered   | 0<br>1  | 0<br>0 | X<br>X    |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Short circuit (current limit)                            | 0<br>1  | 0<br>0 | No<br>Yes |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| <b>Output used as PWM output</b>                         |   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| PWM frequency  | 14.11 Hz; 56.45 Hz; 112.90 Hz; 225.80 Hz; 451.59 Hz; 1758.24 Hz   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| PWM cyclic ratio   | 0 → 100 % 100 steps   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| PWM Max. error   | ≤ 2 % (from 10 % → 90 %)  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Status indicator   | On LCD screen   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Cable length   | ≤ 10 m with shielded twisted cable  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Distance between the power source and the static outputs | ≤ 30 m  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| <b>6 A relay output - 2 outputs from O3 to O4</b>        |   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Breaking voltage   | 250 V~ max  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Breaking current   | 6 A<br>Derating: UL: ≥ 45 °C (113 °F): 4A max   | 6A     |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Maximum breaking current in the common                   | IEC @ 25 °C (77 °F): 12 A<br>IEC @ 60 °C (140 °F) or UL: 10 A   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Mechanical life  | 5 000 000 operations (cycles)   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Electrical durability for 50 000 operating cycles        | 24 V--- tau = 0 ms: 6 A, tau = 7 ms: 3 A, tau = 15 ms: 1.8 A<br>Usage category DC-12: 24 V, 6 A<br>Usage category DC-14: 24 V, 1.8 A<br>250 V~ cos phi = 1: 6 A, cos phi = 0.7: 5 A, cos phi = 0.4: 2.5 A<br>Usage category AC-12: 250 V, 6 A<br>Usage category AC-13: 250 V, 5 A<br>Usage category AC-15: 250 V, 2 A   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Minimum switching capacity                               | 100 mA (at minimum voltage of 12V)  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Maximum operating rate                                   | Off load: 10 Hz<br>At operating current: 0.1 Hz   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Voltage for withstanding shocks                          | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Response time  | Make = 1 cycle time + 8 ms typical<br>Release = 1 cycle time + 4 ms typical   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Built-in protections                                     | Against short-circuits: None<br>Against over voltages and overload: None  |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |
| Status indicator   | On LCD screen   |        |           |        |       |                  |        |        |          |             |        |        |           |              |        |        |        |                               |        |        |           |  |

## EM4B26-ET

## EM4B26

Cable length

 $\leq 30 \text{ m}$ 



## 8 A relay output - 6 outputs from O5 to OA

|   |  |
|---|--|
| Breaking voltage                                  | 250 V $\sim$ max   |
| Breaking current                                  | 8 A<br>Derating: CEI $\geq 55^\circ\text{C}$ ( $131^\circ\text{F}$ ) or UL: $\geq 45^\circ\text{C}$ ( $113^\circ\text{F}$ ): 6A max  |
| Maximum breaking current in the common            | IEC @ $25^\circ\text{C}$ ( $77^\circ\text{F}$ ): C3, C6: 8A; C4, C5: 16 A<br>IEC @ $60^\circ\text{C}$ ( $140^\circ\text{F}$ ) or UL: C3, C6: 8 A; C4, C5: 10 A   |
| Mechanical life                                   | 20 000 000 operations (cycles)   |
| Electrical durability for 50 000 operating cycles | 24 V $\_$ tau = 0 ms: 8 A, tau = 7 ms: 3 A, tau = 15 ms: 1.5 A<br>Usage category DC-12: 24 V, 8 A<br>Usage category DC-14: 24 V, 1.5 A<br>250 V $\sim$ cos phi = 1: 8 A, cos phi = 0.7: 4.75 A, cos phi = 0.4: 3 A<br>Usage category AC-12: 250 V, 8 A<br>Usage category AC-13: 250 V, 4.3 A<br>Usage category AC-15: 250 V, 1.5 A |
| Minimum switching capacity                        | 100 mA (at minimum voltage of 12V)   |
| Maximum operating rate                            | Off load: 10 Hz<br>At operating current: 0.1 Hz  |
| Voltage for withstanding shocks                   | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV   |
| Response time                                     | Make = 1 cycle time + 10 ms typical<br>Release = 1 cycle time + 5 ms typical   |
| Built-in protections                              | Against short-circuits: None<br>Against over voltages and overload: None   |
| Status indicator                                  | On LCD screen  |
| Cable length                                      | $\leq 30 \text{ m}$  |



## Schemes

## Dimensions

Ethernet















Local



## Connections





## INPUTS

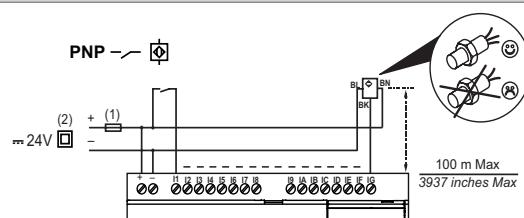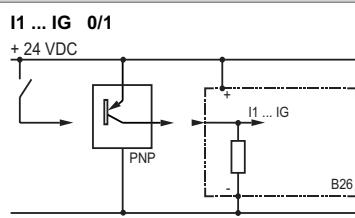

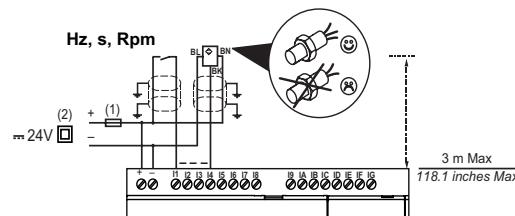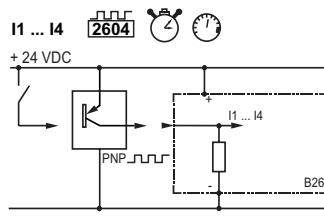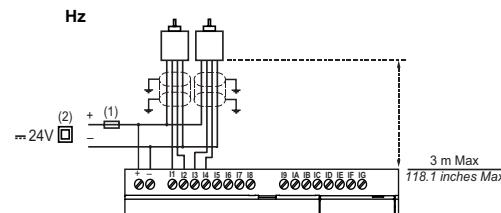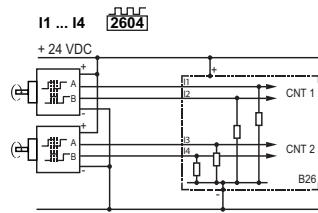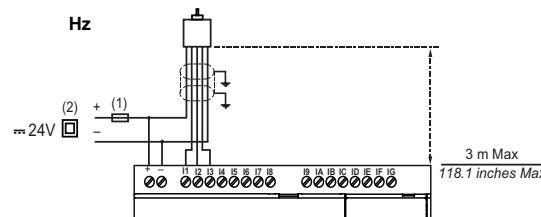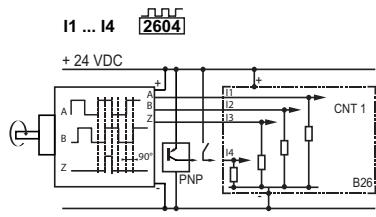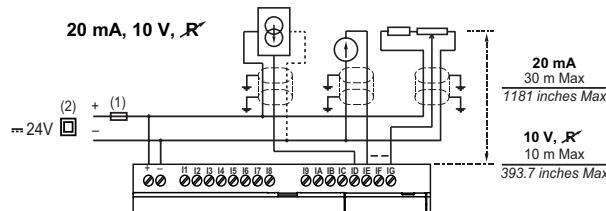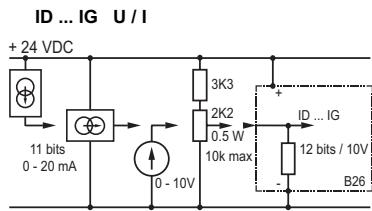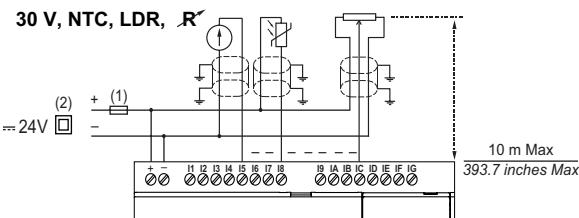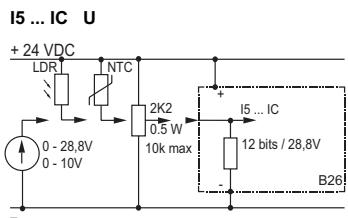


- (1) 1 A (UL248) quick-blowing fuse, circuit-breaker or circuit protector (US)  
 (2) Isolating source

### OUTPUTS

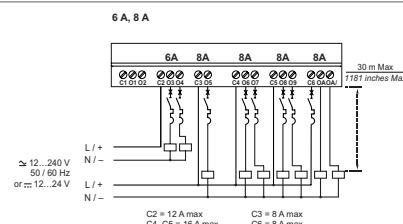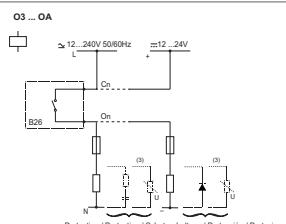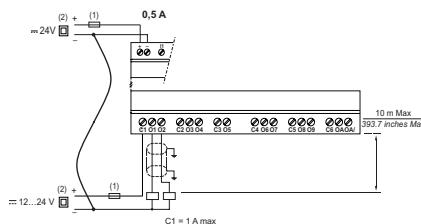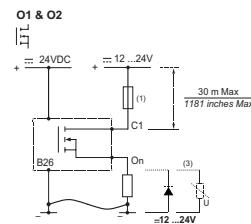

- (3) Inductive load

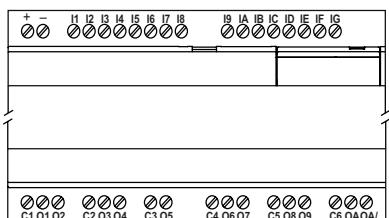**I/O Installations****Warning:**

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.