


## POWER : AC INPUT : AC

100-240 VAC 50/60 Hz

Ambient temperature :  
0 + 55 °C

External contact only

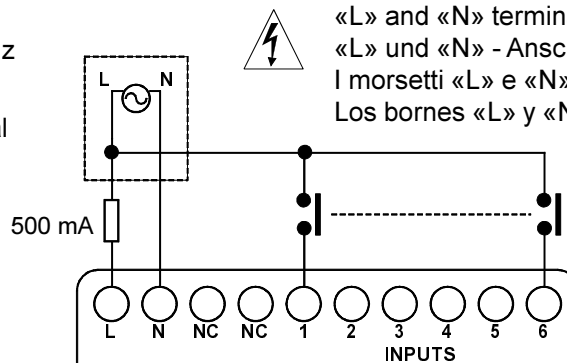



Les bornes «L» et «N» ne sont pas réversibles.  
«L» and «N» terminals are not reversible.  
«L» und «N» - Anschlüsse sind nicht tauschbar.  
I morsetti «L» e «N» non sono reversibile.  
Los bornes «L» y «N» no están reversibles.

## POWER : DC INPUT : DC NPN

24 VDC + 20 % - 15 %

Ambient temperature :  
0 + 55 °C

External contact only


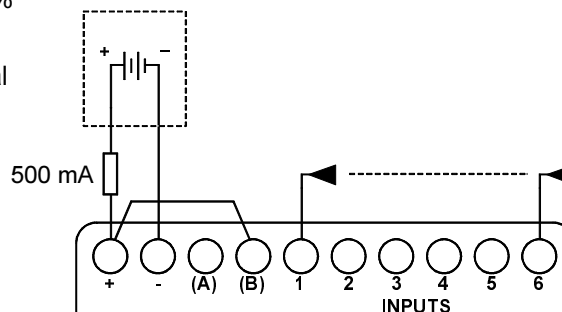


## POWER : DC INPUT : DC PNP

24 VDC + 20 % - 15 %

Ambient temperature :  
0 + 55 °C

External contact only

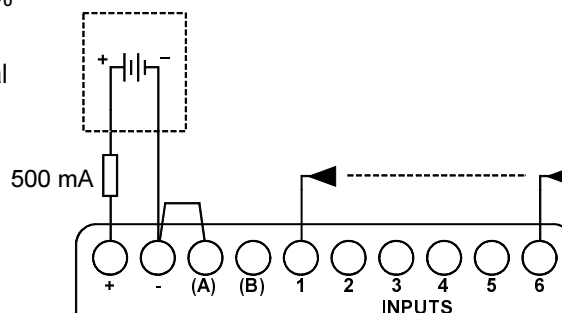

## OUTPUT : RELAY

Resistive load :

8 A 250 VAC 30 VDC

Inductive load :

125 VAC : 245 VA (1/3 hp)

250 VAC : 367 VA (1/2 hp)

