



Sensors Transmitters

Pressure / Temperature / Humidity / Air velocity / Airflow / Air quality / Solar / Light



European Manufacturer



Sensors Transmitters

Pressure / Temperature / Humidity / Air velocity
Airflow / Air quality / Solar / Light

Designed and manufactured in France, KIMO range of transmitters is perfectly suitable for any industry, process, building services, indoor climate, OEM...

KIMO offers many models: from the simplest to the most complete, suitable for any application, with easy configuration and calculation functions. Innovating range: the interchangeable measuring elements enable easy maintenance and on-site calibration.

New products

Monostats / Class 110 / Class 210 / Class 310



Simplified calibration

Monostats/Class 110

Electronic board and measuring element connected to the front side of the sensor, which allows to configure and calibrate your device without causing any damage.



Front PC connection

Monostats/Class 110

This new range has a front side input to allow you to configure the sensor via a PC equipped with the LCC-S software.



Keypad configuration

Class 210

The new class 210 has a keyboard on the front side which allows configuration without modifying the sensor installation.



Perforated housing for **ambient sensors**



Automatic **autozero**



Power supply **LED**



CO/CO₂ sensors



Light/solar transmitters



Atmospheric pressure

Software

LCC-S

LCC-S software allows the configuration of new sensors monostats, class 110, class 210 and class 310.

You can select your units, ranges, relays, alarms, time-delays, outputs, channels, setpoints...



Summary

New products

Monostats

p. 04

New products

Class 110

p. 06

New products

Class 210

p. 10

Class 310

p. 12

Display

p. 16

Akivision

p. 17

Probes

p. 18

Useful info

p. 19

New products

Monostats

Applications: **Refrigeration - Air conditioning**

Quick installation and easy to set up, monostats enable to trigger a relay when you reach the predefined treshold and to send this information via the relay on the regulation system or an automaton for example.



RCR
Relay



IP65
Waterproof
ABS housing



Power supply
24 Vdc/Vac




Alarm
visual and sound



Thermostats TST

TEMPERATURE

Measuring range
From -100 to +400°C

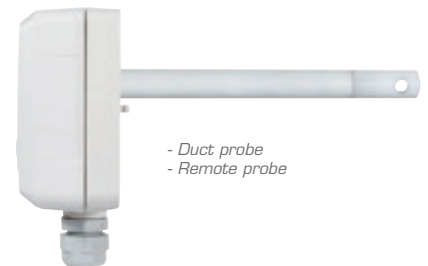

- Duct probe
- Remote probe

Hygrostats HST


HUMIDITY

Measuring range
From 5 to 95 %RH
From -20 to +80°C



1

Sensor with remote probe

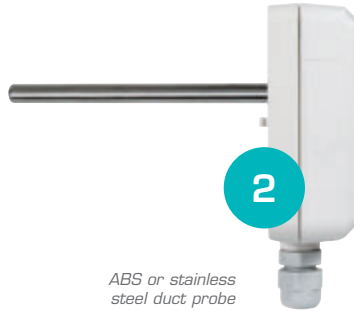

2

ABS or stainless steel duct probe



3

Perforated housing for integrated ambient probe IP20



Manostats PST

PRESSURE

Measuring range
From ± 100 Pa to ± 2000 mbar



COstats COST

CO RATE

Measuring range
From 0 to 500 ppm



CO₂stats CO2ST

AIR QUALITY

Measuring range
From 0 to 5000 ppm

New products

Class 110

Applications: **Refrigeration - Air conditioning - Industries - OEM**

Covering the whole measuring parameters, this communicating range releases a current or voltage signal. To meet the needs of any type of application, sensitive elements are available as ambient, remote or duct. Analogue outputs are automatically adapted to the configured measuring scale via dip switches on the devices or via LCC-S software.



1 or 2 analogue outputs



Waterproof ABS housing



Power supply 24 Vdc/Vac



Configurable outputs



AUTOZERO

Differential pressure transmitters



Atmospheric pressure CP116

Pressure

CP110

111

112

113

114

115



TH 110

TEMPERATURE
HUMIDITY

Measuring range

From 5 to 95 %RH
From -20 to +80°C



HM 110

HUMIDITY

Measuring range

From 5 to 95 %RH



CTV 110

AIR VELOCITY

Measuring range

From 0 to 30 m/s
From 0 to +50°C



CP 110

PRESSURE

Measuring range

From ±100 Pa to ±2000 mbar



CP 116

ATMOSPHERIC
PRESSURE

Measuring range

From 800 to 1100 hPa



TM 50

TEMPERATURE

Measuring range
From -100 to +400°C



TM 110

TEMPERATURE

Measuring range
From -100 to +400°C



CO 110/CO 112

AIR QUALITY

Measuring range
CO: From 0 to 500 ppm
CO₂: From 0 to 5000 ppm



Perforated housing for
ambient sensors



Duct
probe



Remote
probe



Large choice of temperature
probes

Ambient, penetration, bent,
contact, ...



✓
ARTIFICIAL ENVIRONMENT



LR 110

LIGHT

Lighting and electrical products manufacturers

Architecture (office, administration, shop...)

Control, maintenance and visual confort

Food industry and sylviculture

Measuring range

From 0 to 10 000 lux

Photovoltaic and thermal installations control CR 110



Waterproof
ABS housing

✓
NATURAL ENVIRONMENT

CR 110

SOLAR

Measuring range

From 0 to 1500 W/m²

CR 110 allows to:

- Proceed to sunshine surveys
- Determine the correct power supply which must be used (photovoltaic or thermal)
- Check the installation conformity
- Estimate the energetic power produced

New products

Class 210

Applications: **Industries - Laboratories**

Equipped with airtight and strong ABS housing, these sensors have a large 2-line backlit LCD display, and a keyboard on front face for configuration.

Multi-parameter and provided with advanced calculation functions, this range offers a global reading and delivers accurate information on the conditions of your air / thermal process.



2 analogue outputs



Waterproof ABS housing



Power supply
24 Vdc/Vac - 115/230 Vac



Control and measurement of air quality

Minimal global airflow of fresh air

Respects of the limits

Atmosphere monitoring

Ventilation and cleaning up control

...



COT 210/212

CO/CO₂ TEMPERATURE

Measuring range

CO: From 0 to 500 ppm

CO₂: From 0 to 5000 ppm

From -20 to +80°C



CP 210

PRESSURE TEMPERATURE AIR VELOCITY & AIRFLOW

Measuring range

From ±100 Pa

to ±2000 mbar

From -100 to +400°C

From 0 to 100 m/s





Configurable
outputs



Calculation
functions




Password
locking



1
Ambient probe



2
Remote probes

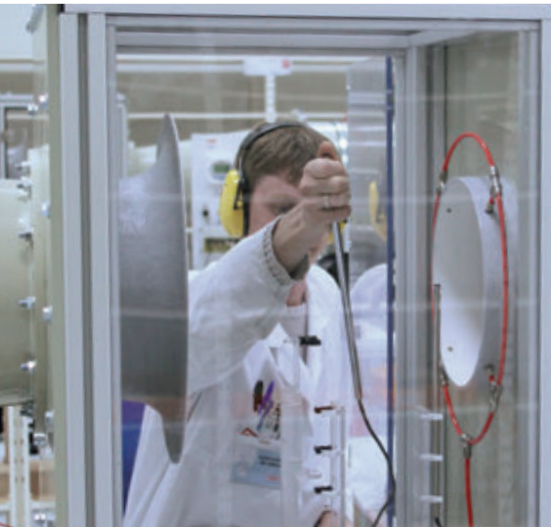

*Enthalpy
Temperature humidity
Absolute humidity
Dew point*



CTV 210

AIR VELOCITY & AIRFLOW

Measuring range
From 0 to 30 m/s
From 0 to +50°C



TH 210

HUMIDITY TEMPERATURE

Measuring range
From 5 to 95 %RH
From -40 to +180°C



TM 210

TEMPERATURE

Measuring range
From -100 to +400°C

NEW GENERATION

Class 310 Multifunction

Pressure/Humidity/Temperature/Air velocity/Airflow/Air quality

4 visual and audible alarms

Graphic display

Software or keypad configuration

With or without display

Easy and quick installation



Waterproof
ABS housing



2 Analogue
Outputs



4 RCR relays
card (option)



Ethernet
Communication



MODBUS
RS 485

✓
ADJUSTMENT
certificate



2 INPUTS
for probes

Interchangeable
Probes

Measure up to
4 parameters




C 310

MULTIFUNCTION

Interchangeable pressure
modules SPI-2

SPI2-100 : ± 100 Pa
SPI2-500 : ± 500 Pa
SPI2-1000 : $\pm 1,000$ Pa
SPI2-10000 : $\pm 10,000$ Pa
SPI-ATMO : 800 to 1,100 hPa

1 INPUT
for module

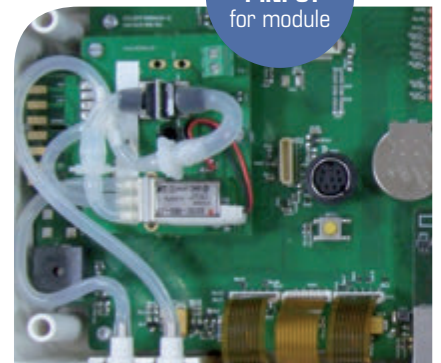



C310 Graphic Display



HISTORICAL graphics display




TREND MARKUP



UP TO 4 PARAMETERS simultaneously



Our range of transmitters can be managed within a Modbus network (RS 485 system). You can also integrate our transmitters to your existing network.

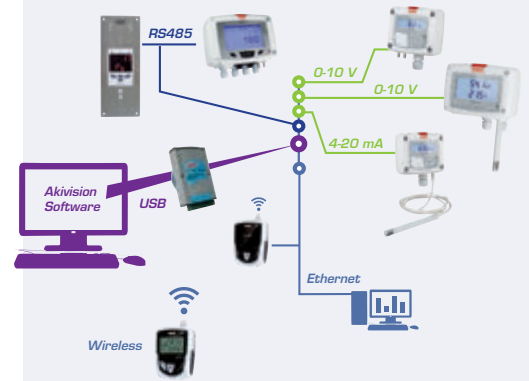

- MODBUS Network (option)**
- Ethernet Communication (option)**
- Configurable analogue outputs**



Learn More
See page 16.



Interchangeable Probes

C 310 / CPE 310-S / CA 310

Unclip - Clip - Measure !

Easy and quick change of measurement element.
Automatic recognition.

- Pressure..... From 0-10 Pa to 10,000 Pa
- Humidity 0 to 100 %RH
- Temperature -50 to +180°C
- Air Velocity..... 0 to 35 m/s
- Airflow 0 to 99,999 m³/h
- CO 0 to 500 ppm
0 to 20.000 on demand
- CO₂ 0 to 5,000 ppm
- Current/Voltage..... 4-20 mA / 0-10 V

Easy Clip



Special Clean Room

Flush-mount

Multifunction pressure sensor



MODBUS
RS 485



3 audible/visual
alarms



Output
Diagnostic



Tenth
Resolution



3 Analogue
Outputs

ADJUSTMENT
certificate



1 INPUT
for probe



Interface for configuration
software and front calibration

CPE 310 S

MULTIFUNCTION

**Multifunction flush mount
transmitter**


Measuring range
-100 to +100 Pa

1 Input for interchangeable
probes (see probes page 13)



LCC-S
Configuration software
(option)

LCC-S software allows the configuration of
new class 310 sensors.
You can select your units, ranges, relays,
alarms, time-delays, outputs, channels, set
points...

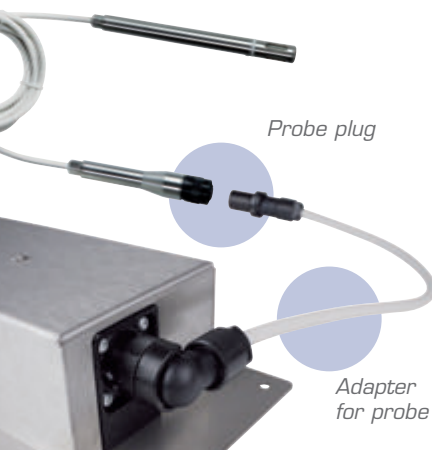

Probe plug

Adapter
for probe



alternative display

Multifunction sensor

Large display transmitter



1 INPUT
for module

1 INPUT
for probe

CA 310

MULTIFUNCTION

Tenth Resolution

Ethernet Communication

MODBUS RS 485

- 1 slot for SPI-2 or MVA card
- 3 RCR relays
- 3 analogue outputs :
0-5/10 V ou 0/4-20 mA
- 3 visual and audible alarms

1 Input for interchangeable probes
(see probes page 13)




ATE 300

MULTI-CHANNEL DISPLAY


Flush-mount
Display 3 parameters alternatively.
RS485 Modbus



Airflow accessories

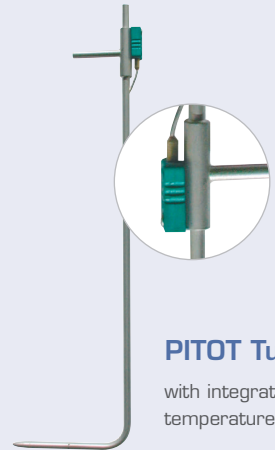

PITOT Tube
with integrated
temperature probe

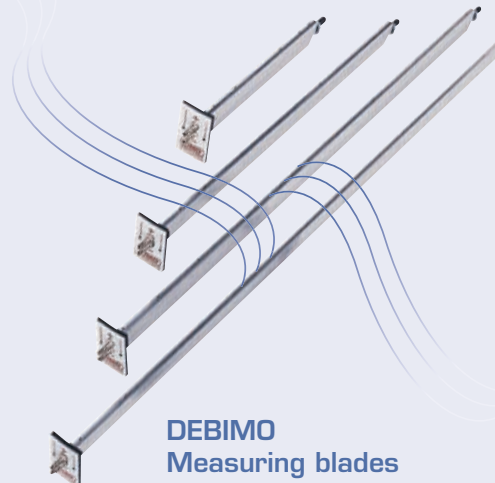

DEBIMO
Measuring blades



SQR3 function

Calculation of air velocity and airflow from
the differential pressure.

Data acquisition System

Applications: **Refrigeration - Air conditioning - Industries - Offices**

New AKIVISION data acquisition system comes to complete current KIMO range of transmitters and was specially developed to monitor air movement conditions in many applications such as service sector, cleanrooms... It is perfectly suitable for process monitoring and control of air.

NEW SOFTWARE



**INTUITIVE
Synoptic
DISPLAY**

New synoptic view for a comprehensive real-time of your installation

Graphic display from the datasets



Up to **255 devices** over network



Real-time Alarm



Ethernet Communication



Wireless datalogger
Kistock RF compliant



MODBUS RS 485

AKIVISION SOFTWARE

CONFIGURATION & ACQUISITION

Configure all transmitters and modules of your installation, record and display measurements in real time.

Configuration of instruments and modules

User access management

Configuration and display of acquisition



VISUALIZATION & OPERATION

Process, consult, analyze and print all measured data.

Data processing and exportation

Alarms log



Remote lookup and display of your records




All our ranges of sensors, dataloggers and temperature sensors are compatible.

SETUP EXAMPLE

hospital application

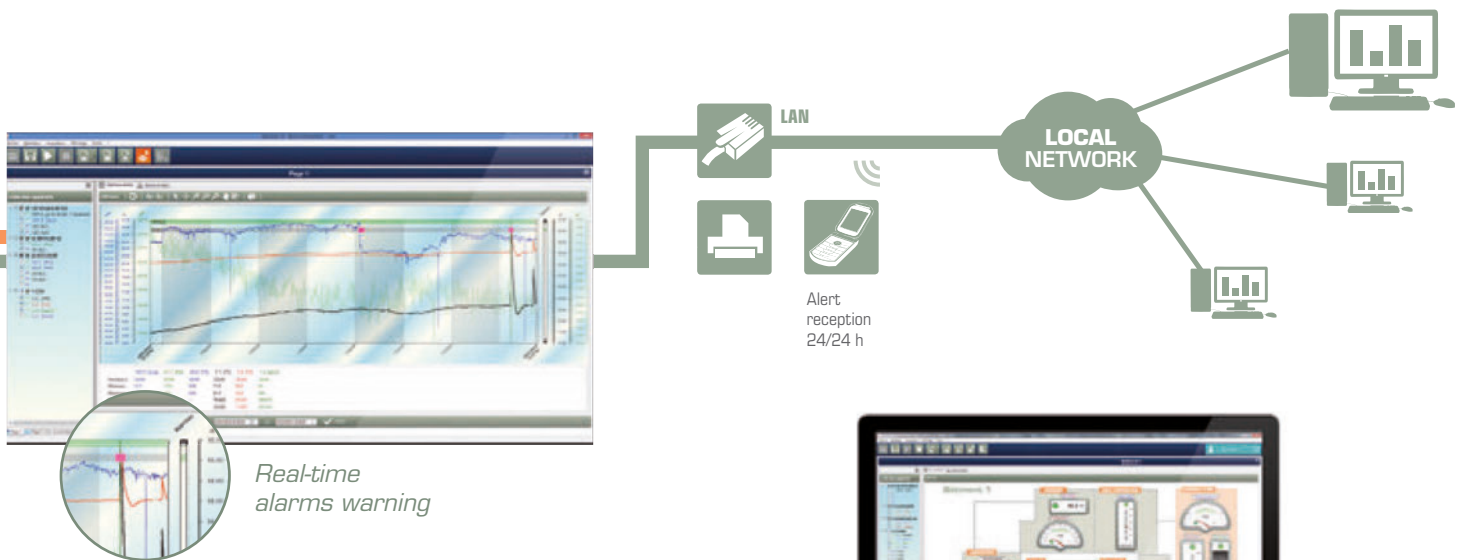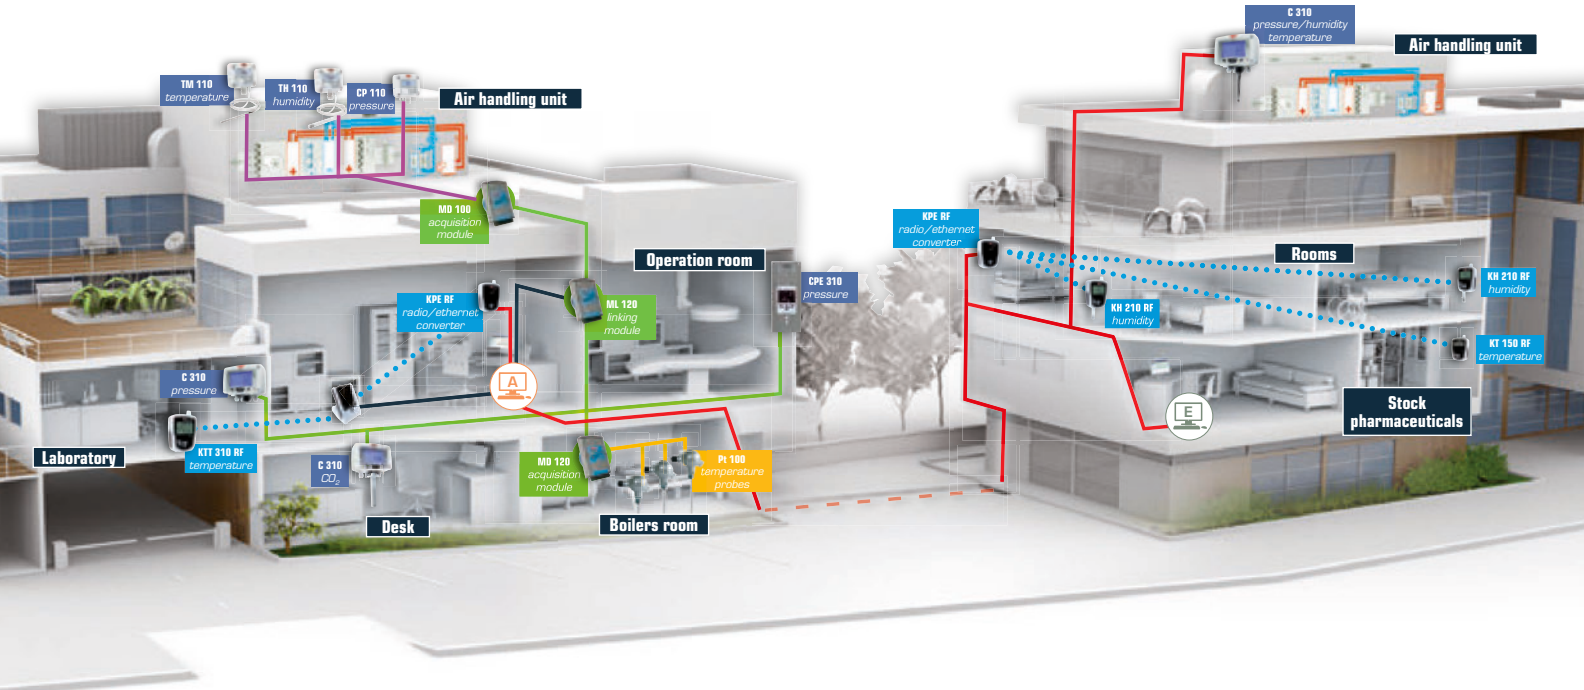

Easy setup, efficient monitoring of air movement condition, clean and cold rooms, test benches...

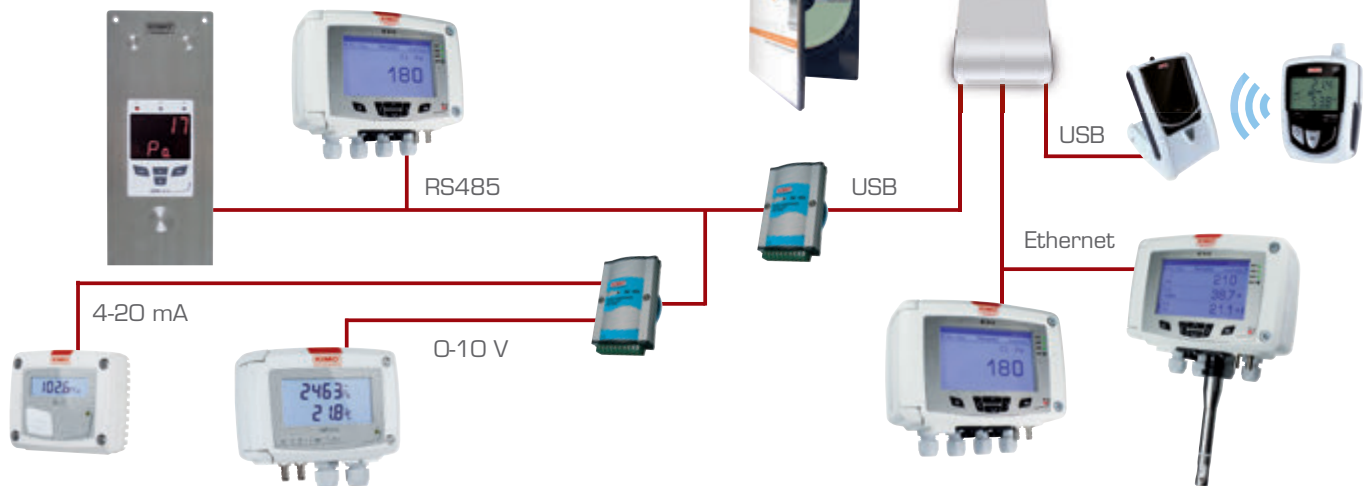

Temperature probes

Applications: **Air conditioning - Industries - Food industry**

Thermocouple K, J, T, N probes

Pt 100 / Pt 1000 probes

NTC probes



Your need, your probe

Your application is specific, we manufacture your customized probe.
CONTACT US !



Connection head

Alu / Noryl® / Stainless steel head

Stainless steel, heat resisting steel or mineral insulated sheath, Alard coating...


Single pair or multipair

Pipe contact

Interchangeable probe system

Aggressive application

Heat-resisting steel protector

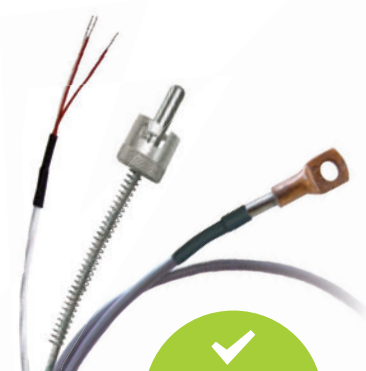

Wire probes

PVC / Silicon / Teflon® / Glass silk cable

Stainless steel hose

Wire mounting: 2, 3, 4, 6 wires

Single pair or multipair

Output DIN connector
With fixing fitting
With cable



Accessories

- Thermocouple connectors (K, J, T, N...)
- Snap-on connectors for thermocouple
- Connector panel for snap-on connectors
- Converters



- Mounting brackets
- Stainless steel thermowells
- Watertight connections




OPTIONS

Useful information


Range **Sensors - Transmitters**

Power supply

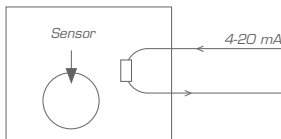

Transmitters with Passive loop

Principle: the transmitter is supplied with a continuous voltage => we measure the current used by the transmitter. This current varies between 4 and 20 mA, proportionally to the measured parameter (pressure, temperature, relative humidity...).

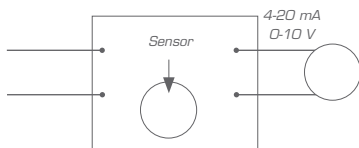


Active transmitter

Principle: the transmitter provides a current (4-20 mA) or a voltage (0-10 V) loop. It can work in either direct (DC) or alternative current (AC). The power supply connected to the transmitter enables it to generate a current of 4-20 mA or a voltage of 0-10 V proportional to the measured parameter.

Humidity transmitters

Capacitive humidity sensor

Principle: the dielectric constant of the humidity sensor varies according to the ambient humidity. This information is then relayed to the transmitter and converted into a digital value. The measuring signal is not affected by the ambient pressure.

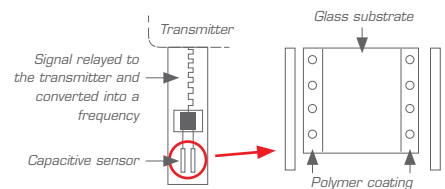


Digital humidity sensor (class 300)

Principle: the dielectric constant of the humidity sensor varies according to the ambient humidity. This information is then relayed by the micro-controller to the transmitter and converted into a digital value.

Smart-Pro



System

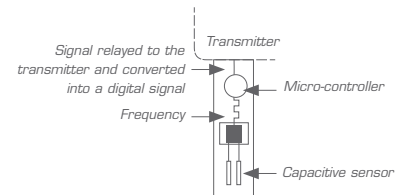

Temperature transmitters

Pt100

Principle: a Pt100 sensor is a resistance, with positive temperature coefficient, which varies according to the temperature. The value of the resistance varies according to the increase of the temperature.


For 0°C ≈ 100 Ω

For 100°C ≈ 138,5 Ω



Thermocouple


Principle: a thermocouple works thanks to voltage drop across dissimilar metals which are placed in contact. This voltage is proportional to the measured temperature.



Pressure transmitters

Principle

A pressure transmitter (piezoresistive type) makes a voltage proportional to the pressure applied on the transmitter.



Security

Secured installation

Locking system with access code, to secure the installation.

Electromagnetical

The KIMO transmitters comply with the EMC norm.



DISCOVER ALL OUR PRODUCT RANGES




General Catalogue



Combustion gas Analysers



Dataloggers

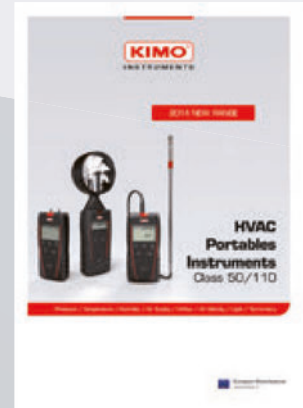

HVAC Portable Instruments

EXPORT SALES DEPARTMENT

KIMO represented worldwide



RCS (24)Périgueux 349 282 085 - Document non contractuel - Nous nous réservons la possibilité de faire évoluer les caractéristiques de nos produits sans préavis

Doc Capteurs - V3 - Anglais - 09/14

